

I n t e r n a t i o n a l T e l e c o m m u n i c a t i o n U n i o n

ITU-T

TELECOMMUNICATION
STANDARDIZATION SECTOR
OF ITU

Z.165

(11/2007)

SERIES Z: LANGUAGES AND GENERAL SOFTWARE
ASPECTS FOR TELECOMMUNICATION SYSTEMS

Formal description techniques (FDT) – Testing and Test
Control Notation (TTCN)

**Testing and Test Control Notation version 3:
TTCN-3 runtime interface (TRI)**

ITU-T Recommendation Z.165



ITU-T Z-SERIES RECOMMENDATIONS
LANGUAGES AND GENERAL SOFTWARE ASPECTS FOR TELECOMMUNICATION SYSTEMS

FORMAL DESCRIPTION TECHNIQUES (FDT)	
Specification and Description Language (SDL)	Z.100–Z.109
Application of formal description techniques	Z.110–Z.119
Message Sequence Chart (MSC)	Z.120–Z.129
Extended Object Definition Language (eODL)	Z.130–Z.139
User Requirements Notation (URN)	Z.150–Z.159
Testing and Test Control Notation (TTCN)	Z.160–Z.199
PROGRAMMING LANGUAGES	
CHILL: The ITU-T high level language	Z.200–Z.209
MAN-MACHINE LANGUAGE	
General principles	Z.300–Z.309
Basic syntax and dialogue procedures	Z.310–Z.319
Extended MML for visual display terminals	Z.320–Z.329
Specification of the man-machine interface	Z.330–Z.349
Data-oriented human-machine interfaces	Z.350–Z.359
Human-machine interfaces for the management of telecommunications networks	Z.360–Z.379
QUALITY	
Quality of telecommunication software	Z.400–Z.409
Quality aspects of protocol-related Recommendations	Z.450–Z.459
METHODS	
Methods for validation and testing	Z.500–Z.519
MIDDLEWARE	
Processing environment architectures	Z.600–Z.609

For further details, please refer to the list of ITU-T Recommendations.

ITU-T Recommendation Z.165

Testing and Test Control Notation version 3: TTCN-3 runtime interface (TRI)

Summary

ITU-T Recommendation Z.165 provides the specification of the runtime interface for TTCN-3 (*Testing and Test Control Notation 3*) test system implementations. The TTCN-3 Runtime Interface provides the recommended adaptation for timing and communication of a test system to a particular processing platform and the system under test, respectively. This Recommendation defines the interface as a set of operations independent of target language.

The interface is defined to be compatible with ITU-T Recommendation Z.161. This Recommendation uses the CORBA Interface Definition Language (IDL) to specify the TRI completely. Clauses 6 and 7 specify language mappings of the abstract specification to the target languages Java and ANSI-C. A summary of the IDL-based interface specification is provided in Annex A.

Source

ITU-T Recommendation Z.165 was approved on 13 November 2007 by ITU-T Study Group 17 (2005-2008) under the ITU-T Recommendation A.8 procedure.

FOREWORD

The International Telecommunication Union (ITU) is the United Nations specialized agency in the field of telecommunications, information and communication technologies (ICTs). The ITU Telecommunication Standardization Sector (ITU-T) is a permanent organ of ITU. ITU-T is responsible for studying technical, operating and tariff questions and issuing Recommendations on them with a view to standardizing telecommunications on a worldwide basis.

The World Telecommunication Standardization Assembly (WTSA), which meets every four years, establishes the topics for study by the ITU-T study groups which, in turn, produce Recommendations on these topics.

The approval of ITU-T Recommendations is covered by the procedure laid down in WTSA Resolution 1.

In some areas of information technology which fall within ITU-T's purview, the necessary standards are prepared on a collaborative basis with ISO and IEC.

NOTE

In this Recommendation, the expression "Administration" is used for conciseness to indicate both a telecommunication administration and a recognized operating agency.

Compliance with this Recommendation is voluntary. However, the Recommendation may contain certain mandatory provisions (to ensure e.g. interoperability or applicability) and compliance with the Recommendation is achieved when all of these mandatory provisions are met. The words "shall" or some other obligatory language such as "must" and the negative equivalents are used to express requirements. The use of such words does not suggest that compliance with the Recommendation is required of any party.

INTELLECTUAL PROPERTY RIGHTS

ITU draws attention to the possibility that the practice or implementation of this Recommendation may involve the use of a claimed Intellectual Property Right. ITU takes no position concerning the evidence, validity or applicability of claimed Intellectual Property Rights, whether asserted by ITU members or others outside of the Recommendation development process.

As of the date of approval of this Recommendation, ITU had not received notice of intellectual property, protected by patents, which may be required to implement this Recommendation. However, implementers are cautioned that this may not represent the latest information and are therefore strongly urged to consult the TSB patent database at <http://www.itu.int/ITU-T/ipr/>.

© ITU 2008

All rights reserved. No part of this publication may be reproduced, by any means whatsoever, without the prior written permission of ITU.

CONTENTS

	Page
1	Scope 1
1.1	Compliance..... 1
2	References..... 1
3	Definitions and abbreviations 2
3.1	Terms defined elsewhere 2
3.2	Terms defined in this Recommendation..... 2
3.3	Abbreviations 3
4	General structure of a TTCN-3 test system 3
4.1	Entities in a TTCN-3 test system..... 4
4.2	Interfaces in a TTCN-3 test system 7
4.3	Execution requirements for a TTCN-3 test system 7
5	TTCN-3 Runtime Interface and operations 7
5.1	Overview of the TRI..... 7
5.2	Error handling..... 9
5.3	Data interface..... 9
5.4	Operation descriptions..... 11
5.5	Communication interface operations..... 12
5.6	Platform interface operations 25
6	Java language mapping..... 28
6.1	Introduction 28
6.2	Names and scopes..... 28
6.3	Type mapping..... 29
6.4	Constants 38
6.5	Mapping of interfaces..... 38
6.6	Optional parameters..... 42
6.7	TRI initialization 42
6.8	Error handling..... 42
7	ANSI C language mapping..... 42
7.1	Introduction 42
7.2	Names and scopes..... 42
7.3	Memory management..... 46
7.4	Error handling..... 47
8	Use scenarios 47
8.1	First scenario 47
8.2	Second scenario 50
8.3	Third scenario 52
Annex A	– IDL Summary 54
Bibliography 57

Introduction

This Recommendation consists of two distinct parts, the first part describing the structure of a TTCN-3 test system implementation and the second part presenting the TTCN-3 Runtime Interface specification.

The first part introduces the decomposition of a TTCN-3 test system into four main entities: Test Management (TM), TTCN-3 Executable (TE), SUT Adaptor (SA), and Platform Adaptor (PA). In addition, the interaction between these entities, i.e., the corresponding interfaces, is defined.

The second part of this Recommendation specifies the TTCN-3 Runtime Interface (TRI). The interface is defined in terms of operations, which are implemented as part of one entity and called by other entities of the test system. For each operation, the interface specification defines associated data structures, the intended effect on the test system and any constraints on the usage of the operation. Note that this interface specification only defines interactions between the TSI and the SUT as well as timer operations.

ITU-T Recommendation Z.165

Testing and Test Control Notation version 3: TTCN-3 runtime interface (TRI)

1 Scope

This Recommendation provides the specification of the runtime interface for TTCN-3 test system implementations. The TTCN-3 Runtime Interface provides a standardized adaptation for timing and communication of a test system to a particular processing platform and the system under test, respectively. This Recommendation defines the interface as a set of operations independent of target language.

The interface is defined to be compatible with the TTCN-3 standards (see clause 2). This Recommendation uses the CORBA Interface Definition Language (IDL) to specify the TRI completely. Clauses 6 and 7 present language mappings for this abstract specification to the target languages Java and ANSI C. A summary of the IDL based interface specification is provided in Annex A.

1.1 Compliance

The requirement for a TTCN-3 test system to be TRI compliant is to adhere to the interface specification stated in this Recommendation as well as to one of the target language mappings included.

EXAMPLE – If a vendor supports Java, the TRI operation calls and implementations, which are part of the TTCN-3 executable, must comply with the IDL to Java mapping specified in this Recommendation.

2 References

The following ITU-T Recommendations and other references contain provisions which, through reference in this text, constitute provisions of this Recommendation. At the time of publication, the editions indicated were valid. All Recommendations and other references are subject to revision; users of this Recommendation are therefore encouraged to investigate the possibility of applying the most recent edition of the Recommendations and other references listed below. A list of the currently valid ITU-T Recommendations is regularly published. The reference to a document within this Recommendation does not give it, as a stand-alone document, the status of a Recommendation.

- [ITU-T X.290] ITU-T Recommendation X.290 (1995), *OSI conformance testing methodology and framework for protocol Recommendations for ITU-T applications – General concepts.*
- [ITU-T X.292] ITU-T Recommendation X.292 (2002), *OSI conformance testing methodology and framework for protocol Recommendations for ITU-T applications – The Tree and Tabular Combined Notation (TTCN).*
- [ITU-T Z.161] ITU-T Recommendation Z.161 (2007), *Testing and Test Control Notation version 3: TTCN-3 core language.*
- [ITU-T Z.164] ITU-T Recommendation Z.164 (2007), *Testing and Test Control Notation version 3: TTCN-3 operational semantics.*

3 Definitions and abbreviations

3.1 Terms defined elsewhere

This Recommendation uses the following terms defined elsewhere:

3.1.1 abstract test suite (ATS): See [ITU-T X.290].

3.1.2 executable test suite (ETS): See [ITU-T X.290].

3.1.3 implementation eXtra information for testing (IXIT): See [ITU-T X.290].

3.1.4 system under test (SUT): See [ITU-T X.290].

NOTE – All types are known at compile time, i.e., are statically bound.

3.1.5 test case: See [ITU-T X.290].

3.1.6 test system: See [ITU-T X.290].

3.2 Terms defined in this Recommendation

This Recommendation defines the following terms:

3.2.1 communication port: Abstract mechanism facilitating communication between test components.

NOTE – A communication port is modelled as a FIFO queue in the receiving direction. Ports can be message-based, procedure-based or a mixture of the two.

3.2.2 explicit timer: Timer that is declared in a TTCN-3 ATS and that can be accessed through TTCN-3 timer operations.

3.2.3 implicit timer: System timer that is created by the TTCN-3 Executable to guard a TTCN-3 call or execute operation.

NOTE – Implicit timers are not accessible to the TTCN-3 user.

3.2.4 platform adaptor (PA): Entity that adapts the TTCN-3 Executable to a particular execution platform.

NOTE – The Platform Adaptor creates a single notion of time for a TTCN-3 test system, and implements external functions as well as explicit and implicit timers.

3.2.5 SUT adaptor (SA): Entity that adapts the TTCN-3 communication operations with the SUT based on an abstract test system interface and implements the real test system interface.

3.2.6 test event: Either sent or received test data (message or procedure call) on a communication port that is part of the test system interface.

3.2.7 test management (TM): Entity that provides a user interface and administers the TTCN-3 test system.

3.2.8 test system interface: Test component that provides a mapping of the ports available in the (abstract) TTCN-3 test system to those offered by a real test system.

3.2.9 timer IDentification (TID): Unique identification for explicit or implicit timer instances that is generated by the TTCN-3 Executable.

3.2.10 TTCN-3 control interface (TCI): Currently a proprietary interface that specifies the interaction between Test Management and TTCN-3 Executable in a test system.

3.2.11 TTCN-3 executable (TE): Part of a test system that deals with interpretation or execution of a TTCN-3 ETS.

3.2.12 TTCN-3 runtime interface (TRI): Interface that defines the interaction of the TTCN-3 Executable with the SUT and Platform Adaptor in a test system.

3.3 Abbreviations

This Recommendation uses the following abbreviations and acronyms:

ATS	Abstract Test Suite
CD	(External) Coding/Decoding
CH	Component Handling
EDS	(Internal) Encoding/Decoding System
ETS	Executable Test Suite
IDL	Interface Definition Language
IXIT	Implementation eXtra Information for Testing
MSC	Message Sequence Chart
MTC	Main Test Component
OMG	Object Management Group
PA	Platform Adaptor
SA	SUT Adaptor
SUT	System Under Test
T3RTS	TTCN-3 RunTime System
TCI	TTCN-3 Control Interfaces
TE	TTCN-3 Executable
TID	Timer IDentification
TL	Test Logging
TM	Test Management
TMC	Test Management and Control
TRI	TTCN-3 Runtime Interfaces
TSI	Test System Interface
TTCN	Testing and Test Control Notation
TTCN-3	Tree and Tabular Combined Notation version 3

4 General structure of a TTCN-3 test system

A TTCN-3 test system can be thought of conceptually as a set of interacting entities where each entity corresponds to a particular aspect of functionality in a test system implementation. These entities manage test execution, interpreting or executing compiled TTCN-3 code, realize proper communication with the SUT, implement external functions, and handle timer operations.

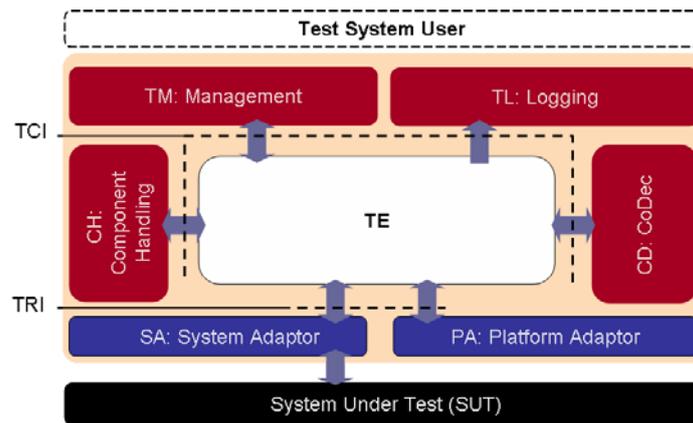


Figure 1 – General structure of a TTCN-3 test system

4.1 Entities in a TTCN-3 test system

The structure of a TTCN-3 test system implementation is illustrated in Figure 1. It should be noted that the further refinement of TM into smaller entities, as shown in Figure 1 and used in the following clauses of this Recommendation, is purely an aid to define TTCN-3 test system interfaces.

The part of the test system that deals with interpretation and execution of TTCN-3 modules, i.e., the Executable Test Suite (ETS), is part of the TTCN-3 Executable (TE). This corresponds either to the executable code produced by a TTCN-3 compiler or a TTCN-3 interpreter in a test system implementation. It is assumed that a test system implementation includes the ETS as derived from a TTCN-3 ATS.

The remaining part of the TTCN-3 test system, which deals with any aspects that cannot be concluded from information being present in the original ATS alone, can be decomposed into Test Management (TM), SUT Adaptor (SA), and Platform Adaptor (PA) entities. In general, these entities cover a test system user interface, test execution control, test event logging, as well as communication with the SUT and timer implementation.

4.1.1 Test management and control (TMC)

In the TMC entity, we can distinguish between functionality related to management of test execution, test event logging, external coding and decoding, and component handling.

4.1.1.1 Test management (TM)

The TM entity is responsible for overall management of the test system. After the test system has been initialized, test execution starts within the TM entity. The entity is responsible for the proper invocation of TTCN-3 modules, i.e., propagating module parameters and/or IXIT information to the TE if necessary. Typically, this entity would also implement a test system user interface.

4.1.1.2 Test logging (TL)

The TL entity is responsible for maintaining the test log. It is explicitly notified to log test events by the TE. The TL entity has a unidirectional interface where any entity part of the TE may post a logging request to the TL entity. A TM internal interface may also be used to record test management information generated by the TE.

4.1.1.3 Coding and decoding (CD)

The CD entity is optionally responsible for the external encoding and decoding data associated with message-based or procedure-based communication within the TE. The external codecs can be used in parallel with, or instead of, the built-in codecs associated with the TE. Unlike the built-in codecs

the external codecs have a standardized interface which makes them portable between different TTCN-3 systems and tools.

4.1.1.4 Component handling (CH)

The CH entity is responsible for distributing parallel test components. This distribution might be across one or many physical systems. The CH entity allows the test management to create and control distributed test systems in a manner which is transparent and independent from the TE.

4.1.2 TTCN-3 executable (TE)

The TE entity is responsible for the interpretation or execution of the TTCN-3 ATS. Conceptually, the TE can be decomposed into three interacting entities: an ETS, TTCN-3 Runtime System (T3RTS), and an optional internal Encoding/Decoding System (EDS) entity. Note that this refinement of the TE into smaller entities is purely a conceptual aid to define TTCN-3 test system interfaces – there is no requirement for this distinction to be reflected in TRI implementations.

The following clauses define the responsibilities of each entity and also discuss the handling of timers in the TRI.

4.1.2.1 Executable test suite (ETS)

The ETS entity handles the execution or interpretation of test cases, the sequencing and matching of test events, as defined in the corresponding TTCN-3 modules [ITU-T Z.161]. It interacts with the T3RTS entity to send, attempt to receive (or match), and log test events during test case execution, to create and remove TTCN-3 test components, as well as to handle external function calls, action operations, and timers. Note that the ETS entity does not directly interact with the SA via the TRI.

4.1.2.2 TTCN-3 runtime system (T3RTS)

The T3RTS entity interacts with the TM, SA and PA entities via TCI and TRI, and manages ETS and EDS entities. The T3RTS initializes adaptors as well as ETS and EDS entities. This entity performs all the actions necessary to properly start the execution of a test case or function with parameters in the ETS entity. It queries the TM entity for module parameter values required by the ETS and sends logging information to it. It also collects and resolves associated verdicts returned by the ETS entity as defined in [ITU-T Z.161].

The T3RTS entity implements the creation and removal of TTCN-3 test components, as well as the TTCN-3 semantics of message- and procedure-based communication, external function calls, action operations and timers. This includes notifying the SUT Adaptor (SA) which message or procedure call is to be sent to the SUT, or the Platform Adaptor (PA) which external function is to be executed or which timers are to be started, stopped, queried, or read. Similarly, the T3RTS notifies the ETS entity of incoming messages or procedure calls from the SUT as well as timeout events.

Prior to sending or receiving messages and procedure calls to or from the SA, or handling function calls and action operations in the PA for the ETS entity, the T3RTS invokes the EDS entity for their encoding or decoding. The T3RTS entity should implement all message and procedure-based communication operations between test components, but only the TTCN-3 semantics of procedure-based communication with the SUT, i.e., the possible blocking and unblocking of test component execution, guarding with implicit timers, and handling of timeout exceptions as a result of such communication operations. All procedure-based communication operations with the SUT are to be realized and identified (in the case of a receiving operation) in the SA as they are most efficiently implemented in a platform specific manner. Note that the timing of any procedure call operation, i.e., implicit timers, is implemented in the Platform Adaptor (PA).

The TTCN-3 Executable is required to maintain its own port queues (distinct from those which may be available in the SA or PA) for input test events to perform snapshots for receiving operations as defined in [ITU-T Z.161]. Timeout events, which are generated by TTCN-3 timer, call timer, or test

case timer implementations, are to be kept in a timeout list as specified in [ITU-T X.292]. In Figure 2, all of this functionality has been assigned to the T3RTS entity. It is responsible to store events that the SA or PA has notified the TE entity of, but which have yet to be processed.

4.1.2.3 Encoding/decoding system (EDS)

The EDS entity is responsible for the internal encoding and decoding of test data, which includes data used in communication operations with the SUT, as specified in the executing TTCN-3 module. If no encoding has been specified for a TTCN-3 module the encoding of data values is tool specific. This entity is invoked by and returns to the T3RTS entity. Note that the EDS entity does not directly interact with the SA via the TRI.

4.1.2.4 Timers in the TTCN-3 executable

Timers that have been declared and named in the TTCN-3 ATS can be conceptually classified as explicit in the TE. Timers that are created by the TE for guarding TTCN-3 procedure calls or execute operations are known in the TE as implicit timers. Explicit as well as implicit timers are both created within the TE but implemented by the Platform Adaptor (PA). This is achieved by generating a unique Timer IDentification (TID) for any timer created in the TE. This unique TID should enable the TE to differentiate between different timers. The TID is to be used by the TE to interact with corresponding timer implementation in the PA.

Note that it is the responsibility of the TE to implement the different TTCN-3 semantics for explicit and implicit timers correctly as defined in [ITU-T Z.161], e.g., the use of keywords `any` and `all` with timers only applies to explicit timers. In the PA all timers, i.e., implicit and explicit, are treated in the same manner.

4.1.3 SUT adaptor (SA)

The SA adapts message- and procedure-based communication of the TTCN-3 test system with the SUT to the particular execution platform of the test system. It is aware of the mapping of the TTCN-3 test component communication ports to test system interface ports and implements the real test system interface as defined in [ITU-T Z.161]. It is responsible to propagate send requests and SUT action operations from the TTCN-3 Executable (TE) to the SUT, and to notify the TE of any received test events by appending them to the port queues of the TE.

Procedure-based communication operations with the SUT are implemented in the SA. The SA is responsible for distinguishing between the different messages within procedure-based communication (i.e., call, reply, and exception) and to propagate them in the appropriate manner either to the SUT or the TE. TTCN-3 procedure based communication semantics, i.e., the effect of such operation on TTCN-3 test component execution, are to be handled in the TE.

The SA has an interface with the TE, which is used to send SUT messages (issued in TTCN-3 SUT action operations) to the SA and to exchange encoded test data between the two entities in communication operations with the SUT.

4.1.4 Platform adaptor (PA)

The PA implements TTCN-3 external functions and provides a TTCN-3 test system with a single notion of time. In this entity, external functions are to be implemented as well as all timers. Notice that timer instances are created in the TE. A timer in the PA can only be distinguished by its Timer IDentification (TID). Therefore, the PA treats both explicit and implicit timers in the same manner.

The interface with the TE enables the invocation of external functions and the starting, reading, and stopping of timers as well as the inquiring of the status of timers using their timer ID. The PA notifies the TE of expired timers.

4.2 Interfaces in a TTCN-3 test system

As previously depicted in Figure 1, a TTCN-3 test system has two interfaces, the TTCN-3 Control Interface (TCI) and the TTCN-3 Runtime Interface (TRI), which specify the interface between Test Management (TM) and TTCN-3 Executable (TE) entities, and TE, SUT Adaptor (SA) and Platform Adaptor (PA) entities, respectively.

This Recommendation defines the TRI. The interaction of the TE with SA and PA will be defined here in terms of TRI operations. Although both interfaces, i.e., the TRI and the TCI, have to be defined for a complete implementation of a TTCN-3 test system the specification and implementation of the TCI is currently considered to be proprietary.

4.3 Execution requirements for a TTCN-3 test system

Each TRI operation call shall be treated as an atomic operation in the calling entity. The called entity, which implements a TRI operation, shall return control to the calling entity as soon as its intended effect has been accomplished or if the operation cannot be completed successfully. The called entity shall not block in the implementation of procedure-based communication. Nevertheless, the called entity shall block after the invocation of an external function implementation and wait for its return value. Notice that depending on the test system implementation failure to return from an external function implementation may result in the infinite blocking of test component execution, the TTCN-3 executable, the Platform Adaptor, or even of the entire test system.

The execution requirements stated above can be realized in a tightly integrated test system implementation. Here, the entire TTCN-3 test system is implemented in a single executable or process where each test system entity is assigned at least one thread of execution. TRI operations can be implemented here as procedure calls.

Note that a looser integration of a test system implementation is still possible, e.g., an implementation of a TTCN-3 test system with multiple SUT Adaptors in a distributed computing environment. In this case only a small part of the SUT Adaptor is tightly integrated with the remainder of the TTCN-3 test system whereas actual SA Adaptors may be realized in separate processes. That small part of SA may then only implement a routing of information provided by TRI operations to the desired SUT Adaptor processes, possibly being executed on remote hosts, and vice versa.

5 TTCN-3 Runtime Interface and operations

This clause defines TRI operations in terms of when they are to be used and what their effect is intended to be in a TTCN-3 test system implementation. Also a set of abstract data types is defined which is then used for the definition of TRI operations. This definition also includes a more detailed description of the input parameters required for each TRI operation call and its return value.

5.1 Overview of the TRI

The TRI defines the interaction between the TTCN-3 Executable (TE), SUT Adaptor (SA), and Platform Adaptor (PA) entities within a TTCN-3 test system implementation. Conceptually, it provides a means for the TE to send test data to the SUT or manipulate timers, and similarly to notify the TE of received test data and timeouts.

The TRI can be considered to consist of two sub-interfaces, a triCommunication and a triPlatform interface. The triCommunication interface addresses the communication of a TTCN-3 ETS with the SUT, which is implemented in the SA. The triPlatform interface represents a set of operations, which adapt an ETS to a particular execution platform.

Table 1 – Interface overview

Interface	Direction (calling entity → called entity)	
Name	TE → SA or PA	SA or PA → TE
triCommunication	TE → SA	SA → TE
triPlatform	TE → PA	PA → TE

Both interfaces are bidirectional so that calling and called parts reside in the TE, SA and PA entities of the test system. Table 1 shows in more detail the caller/callee relationship between the respective entities. Notice that this table only shows interactions visible at the TRI. Internal communication between parts of the same entity is not reflected as the internal structure of the TE, SA or PA may differ in a TTCN-3 test system implementation.

5.1.1 The triCommunication interface

This interface consists of operations that are necessary to implement the communication of the TTCN-3 ETS with the SUT. It includes operations to initialize the Test System Interface (TSI), establish connections to the SUT, and handle message- and procedure-based communication with the SUT. In addition, the triCommunication interface offers an operation to reset the SUT Adaptor (SA).

5.1.2 The triPlatform interface

This interface includes all operations necessary to adapt the TTCN-3 Executable to a particular execution platform. The triPlatform interface offers means to start, stop, read a timer, enquire its status and to add timeout events to the expired timer list. In addition, it offers operations to call TTCN-3 external functions and to reset the Platform Adaptor (PA). Notice that there is no differentiation between explicit and implicit timers required at the triPlatform Interface. Instead each timer shall be addressed uniformly with its Timer Identifier (TID).

5.1.3 Correlation between TTCN-3 and TRI operation invocations

For some TTCN-3 operation invocations there exists a direct correlation to one TRI operation invocation (or possibly two in the case of TTCN-3 `execute` and `call` operations), which is shown in Table 2. For all other TRI operation invocations there may be no direct correlation.

The shown correlation for TTCN-3 communication operations (i.e., `send`, `call`, `reply`, and `raise`) only holds if these operations are invoked on a test component port, which is mapped to a TSI port. Nevertheless, this correlation holds for all such operation invocations if no system component has been specified for a test case, i.e., only the MTC test component is created for a test case and no other test components.

Table 2 – Correlation between TTCN-3 and TRI operation invocations (* = if applicable)

TTCN-3 operation name	TRI operation name	TRI interface name
execute	triExecuteTestCase	TriCommunication
	triStartTimer	TriPlatform
	triEndTestCase	TriCommunication
map	triMap	TriCommunication
unmap	triUnmap	TriCommunication
send	triSend (see Note 1)	TriCommunication
	triSendBC (see Note 2)	
	triSendMC (see Note 3)	

Table 2 – Correlation between TTCN-3 and TRI operation invocations (* = if applicable)

TTCN-3 operation name	TRI operation name	TRI interface name
call	triCall (see Note 1)	TriCommunication
	triCallBC (see Note 2)	
	triCallMC (see Note 3)	
	triStartTimer*	TriPlatform
reply	triReply (see Note 1)	TriCommunication
	triReplyBC (see Note 2)	
	triReplyMC (see Note 3)	
raise	triRaise (see Note 1)	TriCommunication
	triRaiseBC (see Note 2)	
	triRaiseMC (see Note 3)	
action	triSUTactionInformal	TriCommunication
start (timer)	triStartTimer	TriPlatform
stop (timer)	triStopTimer	TriPlatform
read (timer)	triReadTimer	TriPlatform
running (timer)	triTimerRunning	TriPlatform
TTCN-3 external function	triExternalFunction	TriPlatform
NOTE 1 – For unicast communication.		
NOTE 2 – For broadcast communication.		
NOTE 3 – For multicast communication.		

Note that all of the TRI operations listed in Table 2 are used by the TE and that the TE may implement the invocation of these operations differently when evaluating a TTCN snapshot within the TTCN-3 ETS.

5.2 Error handling

Explicit error handling is specified only for TRI operations called by the TTCN-3 Executable (TE). The SA or PA reports the status of a TRI operation in the return value of a TRI operation. The status value can either indicate the local success (*TRI_OK*) or failure (*TRI_Error*) of the TRI operation. Therefore, the TE may react to an error that occurred either within the SA or PA and issue, e.g., a test case error.

For TRI operations called by the SA or PA no explicit error handling is required since these operations are implemented in the TE. Here, the TE is in control over the test execution in the case that an error occurs in such a TRI operation.

Notice that specific error codes as well as the detection and handling of errors in any of the test system entities are beyond the scope of the current TRI specification.

5.3 Data interface

In the TRI operations only encoded test data shall be passed. The TTCN-3 Executable (TE) is responsible for encoding test data to be sent and decoding received test data in the respective TRI operations since encoding rules can be specified for or within a TTCN-3 module. Notice that the TE is required to encode test data even if no encoding information has been provided in a TTCN-3 ATS. In this case the tool vendor has to define an encoding.

Instead of defining an explicit data interface for TTCN-3 and ASN.1 data types, the TRI standard defines a set of abstract data types. These data types are used in the following definition of TRI operations to indicate which information is to be passed from the calling to the called entity, and vice versa. The concrete representation of these abstract data types as well as the definition of basic data types are defined in the respective language mappings in clauses 6 and 7.

Notice that the values for any identifier data type shall be unique in the test system implementation where uniqueness is defined as being globally distinct at any point in time.

The following abstract data types are defined and used for the definition of TRI operations.

5.3.1 Connection

`TriComponentIdType` A value of type `TriComponentIdType` includes an identifier, a name and the component type. The distinct value of the latter is the component type name as specified in the TTCN-3 ATS. This abstract type is mainly used to resolve TRI communication operations on TSI ports that have mappings to many test component ports.

`TriComponentIdListType` A value of type `TriComponentIdListType` is a list of `TriComponentIdType`. This abstract type is used for multicast communication in TCI.

`TriPortIdType` A value of type `TriPortIdType` includes a value of type `TriComponentIdType` to represent the component to which the port belongs, a port index (if present), and the port and port type name as specified in the TTCN-3 ATS. The `TriPortIdType` type is mainly required to pass information about the TSI and connections to the TSI from the TE to the SA.

`TriPortIdListType` A value of type `TriPortIdListType` is a list of `TriPortIdType`. This abstract type is used for initialization purposes after the invocation of a TTCN-3 test case.

5.3.2 Communication

`TriMessageType` A value of type `TriMessageType` is encoded test data that either is to be sent to the SUT or has been received from the SUT.

`TriAddressType` A value of type `TriAddressType` indicates a source or destination address within the SUT. This abstract type can be used in TRI communication operations and is an open type, which is opaque to the TE.

`TriAddressListType` A value of type `TriAddressListType` is a list of `TriAddressType`. This abstract type is used for multicast communication in TRI.

`TriSignatureIdType` A value of type `TriSignatureIdType` is the name of a procedure signature as specified in the TTCN-3 ATS. This abstract type is used in procedure based TRI communication operations.

TriParameterType	A value of type TriParameterType includes an encoded parameter and a value of TriParameterPassingModeType to represent the passing mode specified for the parameter in the TTCN-3 ATS.
TriParameterPassingModeType	A value of type TriParameterPassingModeType is either <i>in</i> , <i>inout</i> , or <i>out</i> . This abstract type is used in procedure based TRI communication operations and for external function calls.
TriParameterListType	A value of type TriParameterListType is a list of TriParameterType. This abstract type is used in procedure based TRI communication operations and for external function calls.
TriExceptionType	A value of type TriExceptionType is an encoded type and value of an exception that either is to be sent to the SUT or has been received from the SUT. This abstract type is used in procedure based TRI communication operations.

5.3.3 Timer

TriTimerIdType	A value of type TriTimerIdType specifies an identifier for a timer. This abstract type is required for all TRI timer operations.
TriTimerDurationType	A value of type TriTimerDurationType specifies the duration for a timer in seconds.

5.3.4 Miscellaneous

TriTestCaseIdType	A value of type TriTestCaseIdType is the name of a test case as specified in the TTCN-3 ATS.
TriFunctionIdType	A value of type TriFunctionIdType is the name of an external function as specified in the TTCN-3 ATS.
TriStatusType	A value of type TriStatusType is either TRI_OK or TRI_Error indicating the success or failure of a TRI operation.

5.4 Operation descriptions

All operation definitions are defined using the Interface Definition Language (IDL). Concrete language mappings are defined in clauses 6 and 7.

For every TRI operation call all *in*, *inout*, and *out* parameters listed in the particular operation definition are mandatory. The value of an *in* parameter is specified by the calling entity. Similarly, the value of an *out* parameter is specified by the called entity. In the case of an *inout* parameter, a value is first specified by the calling entity but may be replaced with a new value by the called entity. Note that although TTCN-3 also uses *in*, *inout*, and *out* for signature definitions the denotations used in TRI IDL specification are not related to those in a TTCN-3 specification.

Operation calls should use a reserved value to indicate the absence of parameters that are defined as optional in the corresponding TRI parameter description. The reserved values for these types are defined in each language mapping and will be subsequently referred to as the `null` value.

All functions in the interface are described using the following template:

F.n.m	Operation Name calling entity → called entity
Signature	IDL-Signature
In Parameters	Description of data passed as parameters to the operation from the calling entity to the called entity.
Out Parameters	Description of data passed as parameters to the operation from the called entity to the calling entity.
InOutParameters	Description of data passed as parameters to the operation from the calling entity to the called entity and from the called entity back to the calling entity.
Return Value	Description of data returned from the operation to the calling entity.
Constraints	Description of any constraints that apply to calling the operation.
Effect	Behaviour required of the called entity before the operation may return.

5.5 Communication interface operations

5.5.1 triSAReset (TE → SA)

Signature	TriStatusType triSAReset()
In Parameters	n.a.
Out Parameters	n.a.
Return Value	The return status of the triSAReset operation. The return status indicates the local success (<i>TRI_OK</i>) or failure (<i>TRI_Error</i>) of the operation.
Constraints	This operation can be called by the TE at any time to reset the SA.
Effect	The SA shall reset all communication means that it is maintaining, e.g., reset static connections to the SUT, close dynamic connections to the SUT, discard any pending messages or procedure calls. The triSAReset operation returns <i>TRI_OK</i> in case the operation has been successfully performed, <i>TRI_Error</i> otherwise.

5.5.2 Connection handling operations

5.5.2.1 triExecuteTestCase (TE → SA)

Signature	TriStatusType triExecuteTestCase(in TriTestCaseIdType testCaseId, in TriPortIdListType tsiPortList)
In Parameters	testCaseId identifier of the test case that is going to be executed tsiPortList a list of test system interface ports defined for the test system
Out Parameters	n.a.
Return Value	The return status of the triExecuteTestCase operation. The return status indicates the local success (<i>TRI_OK</i>) or failure (<i>TRI_Error</i>) of the operation.
Constraints	This operation is called by the TE immediately before the execution of any test case. The test case that is going to be executed is indicated by the testCaseId. tsiPortList contains all ports that have been declared in the definition of the system component for the test case, i.e., the TSI ports. If a system component has not been explicitly defined for the test case in the TTCN-3 ATS then the tsiPortList contains all communication ports of the MTC test component. The ports in tsiPortList are ordered as they appear in the respective TTCN-3 component declaration.

Effect	The SA can set up any static connections to the SUT and initialize any communication means for TSI ports. The <code>triExecuteTestCase</code> operation returns <i>TRI_OK</i> in case the operation has been successfully performed, <i>TRI_Error</i> otherwise.
---------------	--

5.5.2.2 triMap (TE → SA)

Signature	<code>TriStatusType triMap(in TriPortIdType compPortId, in TriPortIdType tsiPortId)</code>
In Parameters	<code>compPortId</code> identifier of the test component port to be mapped <code>tsiPortId</code> identifier of the test system interface port to be mapped
Out Parameters	n.a.
Return Value	The return status of the <code>triMap</code> operation. The return status indicates the local success (<i>TRI_OK</i>) or failure (<i>TRI_Error</i>) of the operation.
Constraints	This operation is called by the TE when it executes a TTCN-3 map operation.
Effect	The SA can establish a dynamic connection to the SUT for the referenced TSI port. The <code>triMap</code> operation returns <i>TRI_Error</i> in case a connection could not be established successfully, <i>TRI_OK</i> otherwise. The operation should return <i>TRI_OK</i> in case no dynamic connection needs to be established by the test system.

5.5.2.3 triUnmap (TE → SA)

Signature	<code>TriStatusType triUnmap(in TriPortIdType compPortId, in TriPortIdType tsiPortId)</code>
In Parameters	<code>compPortId</code> identifier of the test component port to be unmapped <code>tsiPortId</code> identifier of the test system interface port to be unmapped
Out Parameters	n.a.
Return Value	The return status of the <code>triUnmap</code> operation. The return status indicates the local success (<i>TRI_OK</i>) or failure (<i>TRI_Error</i>) of the operation.
Constraints	This operation is called by the TE when it executes any TTCN-3 unmap operation.
Effect	The SA shall close a dynamic connection to the SUT for the referenced TSI port. The <code>triUnmap</code> operation returns <i>TRI_Error</i> in case a connection could not be closed successfully or no such connection has been established previously, <i>TRI_OK</i> otherwise. The operation should return <i>TRI_OK</i> in case no dynamic connections have to be established by the test system.

5.5.2.4 triEndTestCase (TE → SA)

Signature	<code>TriStatusType triEndTestCase()</code>
In Parameters	n.a.
Out Parameters	n.a.
Return Value	The return status of the <code>triEndTestCase</code> operation. The return status indicates the local success (<i>TRI_OK</i>) or failure (<i>TRI_Error</i>) of the operation.
Constraints	This operation is called by the TE immediately after the execution of any test case.
Effect	The SA can free resources, cease communication at system ports and to test components. The <code>triEndTestCase</code> operation returns <i>TRI_OK</i> in case the operation has been successfully performed, <i>TRI_Error</i> otherwise.

5.5.3 Message-based communication operations

5.5.3.1 triSend (TE → SA)

Signature	TriStatusType triSend(in TriComponentIdType componentId, in TriPortIdType tsiPortId, in TriAddressType SUTaddress, in TriMessageType sendMessage)
In Parameters	componentId identifier of the sending test component tsiPortId identifier of the test system interface port via which the message is sent to the SUT Adaptor SUTaddress (optional) destination address within the SUT sendMessage the encoded message to be sent
Out Parameters	n.a.
Return Value	The return status of the triSend operation. The return status indicates the local success (<i>TRI_OK</i>) or failure (<i>TRI_Error</i>) of the operation.
Constraints	This operation is called by the TE when it executes a TTCN-3 unicast send operation on a component port, which has been mapped to a TSI port. This operation is called by the TE for all TTCN-3 send operations if no system component has been specified for a test case, i.e., only a MTC test component is created for a test case. The encoding of sendMessage has to be done in the TE prior to this TRI operation call.
Effect	The SA can send the message to the SUT. The triSend operation returns <i>TRI_OK</i> in case it has been completed successfully. Otherwise <i>TRI_Error</i> shall be returned. Notice that the return value <i>TRI_OK</i> does not imply that the SUT has received sendMessage.

5.5.3.2 triSendBC (TE → SA)

Signature	TriStatusType triSendBC(in TriComponentIdType componentId, in TriPortIdType tsiPortId, in TriMessageType sendMessage)
In Parameters	componentId identifier of the sending test component tsiPortId identifier of the test system interface port via which the message is sent to the SUT Adaptor sendMessage the encoded message to be sent
Out Parameters	n.a.
Return Value	The return status of the triSendBC operation. The return status indicates the local success (<i>TRI_OK</i>) or failure (<i>TRI_Error</i>) of the operation.
Constraints	This operation is called by the TE when it executes a TTCN-3 broadcast send operation on a component port, which has been mapped to a TSI port. This operation is called by the TE for all TTCN-3 send operations if no system component has been specified for a test case, i.e., only a MTC test component is created for a test case. The encoding of sendMessage has to be done in the TE prior to this TRI operation call.

Effect	<p>The SA can broadcast the message to the SUT.</p> <p>The <code>triSendBC</code> operation returns <code>TRI_OK</code> in case it has been completed successfully. Otherwise <code>TRI_Error</code> shall be returned. Notice that the return value <code>TRI_OK</code> does not imply that the SUT has received <code>sendMessage</code>.</p>
---------------	---

5.5.3.3 triSendMC (TE → SA)

Signature	<pre>TriStatusType triSendMC(in TriComponentIdType componentId, in TriPortIdType tsiPortId, in TriAddressListType SUTaddresses, in TriMessageType sendMessage)</pre>
In Parameters	<p><code>componentId</code> identifier of the sending test component</p> <p><code>tsiPortId</code> identifier of the test system interface port via which the message is sent to the SUT Adaptor</p> <p><code>SUTaddresses</code> destination addresses within the SUT</p> <p><code>sendMessage</code> the encoded message to be sent</p>
Out Parameters	n.a.
Return Value	The return status of the <code>triSendMC</code> operation. The return status indicates the local success (<code>TRI_OK</code>) or failure (<code>TRI_Error</code>) of the operation.
Constraints	<p>This operation is called by the TE when it executes a TTCN-3 multicast send operation on a component port, which has been mapped to a TSI port. This operation is called by the TE for all TTCN-3 send operations if no system component has been specified for a test case, i.e., only a MTC test component is created for a test case.</p> <p>The encoding of <code>sendMessage</code> has to be done in the TE prior to this TRI operation call.</p>
Effect	<p>The SA can multicast the message to the SUT.</p> <p>The <code>triSendMC</code> operation returns <code>TRI_OK</code> in case it has been completed successfully. Otherwise <code>TRI_Error</code> shall be returned. Notice that the return value <code>TRI_OK</code> does not imply that the SUT has received <code>sendMessage</code>.</p>

5.5.3.4 triEnqueueMsg (SA → TE)

Signature	<pre>void triEnqueueMsg(in TriPortIdType tsiPortId, in TriAddressType SUTaddress, in TriComponentIdType componentId, in TriMessageType receivedMessage)</pre>
In Parameters	<p><code>tsiPortId</code> identifier of the test system interface port via which the message is enqueued by the SUT Adaptor</p> <p><code>SUTaddress</code> (optional) source address within the SUT</p> <p><code>componentId</code> identifier of the receiving test component</p> <p><code>receivedMessage</code> the encoded received message</p>
Out Parameters	n.a.
Return Value	void

Constraints	<p>This operation is called by the SA after it has received a message from the SUT. It can only be used when <code>tsiPortId</code> has been either previously mapped to a port of <code>componentId</code> or has been referenced in the previous <code>triExecuteTestCase</code> statement.</p> <p>In the invocation of a <code>triEnqueueMsg</code> operation <code>receivedMessage</code> shall contain an encoded value.</p>
Effect	<p>This operation shall pass the message to the TE indicating the component <code>componentId</code> to which the TSI port <code>tsiPortId</code> is mapped.</p> <p>The decoding of <code>receivedMessage</code> has to be done in the TE.</p>

5.5.4 Procedure-based communication operations

5.5.4.1 triCall (TE → SA)

Signature	<pre>TriStatusType triCall(in TriComponentIdType componentId, in TriPortIdType tsiPortId, in TriAddressType SUTaddress, in TriSignatureIdType signatureId, in TriParameterListType parameterList)</pre>
In Parameters	<p><code>componentId</code> identifier of the test component issuing the procedure call</p> <p><code>tsiPortId</code> identifier of the test system interface port via which the procedure call is sent to the SUT Adaptor</p> <p><code>SUTaddress</code> (optional) destination address within the SUT</p> <p><code>signatureId</code> identifier of the signature of the procedure call</p> <p><code>parameterList</code> a list of encoded parameters which are part of the indicated signature. The parameters in <code>parameterList</code> are ordered as they appear in the TTCN-3 signature declaration</p>
Out Parameters	n.a.
Return Value	The return status of the <code>triCall</code> operation. The return status indicates the local success (<i>TRI_OK</i>) or failure (<i>TRI_Error</i>) of the operation.
Constraints	<p>This operation is called by the TE when it executes a TTCN-3 unicast call operation on a component port, which has been mapped to a TSI port. This operation is called by the TE for all TTCN-3 call operations if no system component has been specified for a test case, i.e., only a MTC test component is created for a test case.</p> <p>All <i>in</i> and <i>inout</i> procedure parameters contain encoded values.</p> <p>The procedure parameters are the parameters specified in the TTCN-3 signature template. Their encoding has to be done in the TE prior to this TRI operation call.</p>
Effect	<p>On invocation of this operation the SA can initiate the procedure call corresponding to the signature identifier <code>signatureId</code> and the TSI port <code>tsiPortId</code>. The <code>triCall</code> operation shall return without waiting for the return of the issued procedure call (see note). This TRI operation returns <i>TRI_OK</i> on successful initiation of the procedure call, <i>TRI_Error</i> otherwise. No error shall be indicated by the SA in case the value of any <i>out</i> parameter is non-null. Notice that the return value of this TRI operation does not make any statement about the success or failure of the procedure call. Note that an optional timeout value, which can be specified in the TTCN-3 ATS for a call operation, is <i>not</i> included in the <code>triCall</code> operation signature. The TE is responsible to address this issue by starting a timer for the TTCN-3 call operation in the PA with a separate TRI operation call, i.e., <code>triStartTimer</code>.</p>
<p>NOTE – This might be achieved for example by spawning a new thread or process. This handling of this procedure call is, however, dependent on implementation of the TE.</p>	

5.5.4.2 triCallBC (TE → SA)

Signature	TriStatusType triCallBC(in TriComponentIdType componentId, in TriPortIdType tsiPortId, in TriSignatureIdType signatureId, in TriParameterListType parameterList)
In Parameters	<p>componentId identifier of the test component issuing the procedure call</p> <p>tsiPortId identifier of the test system interface port via which the procedure call is sent to the SUT Adaptor</p> <p>signatureId identifier of the signature of the procedure call</p> <p>parameterList a list of encoded parameters which are part of the indicated signature. The parameters in parameterList are ordered as they appear in the TTCN-3 signature declaration.</p>
Out Parameters	n.a.
Return Value	The return status of the triCallBC operation. The return status indicates the local success (<i>TRI_OK</i>) or failure (<i>TRI_Error</i>) of the operation.
Constraints	This operation is called by the TE when it executes a TTCN-3 broadcast call operation on a component port, which has been mapped to a TSI port. This operation is called by the TE for all TTCN-3 call operations if no system component has been specified for a test case, i.e., only a MTC test component is created for a test case. All <i>in</i> and <i>inout</i> procedure parameters contain encoded values. The procedure parameters are the parameters specified in the TTCN-3 signature template. Their encoding has to be done in the TE prior to this TRI operation call.
Effect	On invocation of this operation the SA can initiate and broadcast the procedure call corresponding to the signature identifier signatureId and the TSI port tsiPortId. The triCallBC operation shall return without waiting for the return of the issued procedure call (see note). This TRI operation returns <i>TRI_OK</i> on successful initiation of the procedure call, <i>TRI_Error</i> otherwise. No error shall be indicated by the SA in case the value of any <i>out</i> parameter is non-null. Notice that the return value of this TRI operation does not make any statement about the success or failure of the procedure call. Note that an optional timeout value, which can be specified in the TTCN-3 ATS for a call operation, is <i>not</i> included in the triCallBC operation signature. The TE is responsible to address this issue by starting a timer for the TTCN-3 call operation in the PA with a separate TRI operation call, i.e., triStartTimer.

NOTE – This might be achieved for example by spawning a new thread or process. This handling of this procedure call is, however, dependent on implementation of the TE.

5.5.4.3 triCallMC (TE → SA)

Signature	TriStatusType triCallMC(in TriComponentIdType componentId, in TriPortIdType tsiPortId, in TriAddressListType SUTaddresses, in TriSignatureIdType signatureId, in TriParameterListType parameterList)
------------------	--

In Parameters	<p><code>componentId</code> identifier of the test component issuing the procedure call</p> <p><code>tsiPortId</code> identifier of the test system interface port via which the procedure call is sent to the SUT Adaptor</p> <p><code>SUTaddresses</code> destination addresses within the SUT</p> <p><code>signatureId</code> identifier of the signature of the procedure call</p> <p><code>parameterList</code> a list of encoded parameters which are part of the indicated signature. The parameters in <code>parameterList</code> are ordered as they appear in the TTCN-3 signature declaration.</p>
Out Parameters	n.a.
Return Value	The return status of the <code>triCallMC</code> operation. The return status indicates the local success (<i>TRI_OK</i>) or failure (<i>TRI_Error</i>) of the operation.
Constraints	This operation is called by the TE when it executes a TTCN-3 multicast call operation on a component port, which has been mapped to a TSI port. This operation is called by the TE for all TTCN-3 call operations if no system component has been specified for a test case, i.e., only a MTC test component is created for a test case. All <i>in</i> and <i>inout</i> procedure parameters contain encoded values. The procedure parameters are the parameters specified in the TTCN-3 signature template. Their encoding has to be done in the TE prior to this TRI operation call.
Effect	On invocation of this operation the SA can initiate and multicast the procedure call corresponding to the signature identifier <code>signatureId</code> and the TSI port <code>tsiPortId</code> . The <code>triCallMC</code> operation shall return without waiting for the return of the issued procedure call (see note). This TRI operation returns <i>TRI_OK</i> on successful initiation of the procedure call, <i>TRI_Error</i> otherwise. No error shall be indicated by the SA in case the value of any <i>out</i> parameter is non-null. Notice that the return value of this TRI operation does not make any statement about the success or failure of the procedure call. Note that an optional timeout value, which can be specified in the TTCN-3 ATS for a call operation, is <i>not</i> included in the <code>triCallMC</code> operation signature. The TE is responsible to address this issue by starting a timer for the TTCN-3 call operation in the PA with a separate TRI operation call, i.e., <code>triStartTimer</code> .
NOTE – This might be achieved for example by spawning a new thread or process. This handling of this procedure call is, however, dependent on implementation of the TE.	

5.5.4.4 triReply (TE → SA)

Signature	<pre>TriStatusType triReply(in TriComponentIdType componentId, in TriPortIdType tsiPortId, in TriAddressType SUTaddress, in TriSignatureIdType signatureId, in TriParameterListType parameterList, in TriParameterType returnValue)</pre>
------------------	---

In Parameters	<p><code>componentId</code> identifier of the replying test component</p> <p><code>tsiPortId</code> identifier of the test system interface port via which the reply is sent to the SUT Adaptor</p> <p><code>SUTaddress</code> (optional) destination address within the SUT</p> <p><code>signatureId</code> identifier of the signature of the procedure call</p> <p><code>parameterList</code> a list of encoded parameters which are part of the indicated signature. The parameters in <code>parameterList</code> are ordered as they appear in the TTCN-3 signature declaration</p> <p><code>returnValue</code> (optional) encoded return value of the procedure call</p>
Out Parameters	n.a.
Return Value	The return status of the <code>triReply</code> operation. The return status indicates the local success (<i>TRI_OK</i>) or failure (<i>TRI_Error</i>) of the operation.
Constraints	<p>This operation is called by the TE when it executes a TTCN-3 unicast reply operation on a component port that has been mapped to a TSI port. This operation is called by the TE for all TTCN-3 reply operations if no system component has been specified for a test case, i.e., only a MTC test component is created for a test case. All <i>out</i> and <i>inout</i> procedure parameters and the return value contain encoded values. The <code>parameterList</code> contains procedure call parameters. These parameters are the parameters specified in the TTCN-3 signature template. Their encoding has to be done in the TE prior to this TRI operation call.</p> <p>If no return type has been defined for the procedure signature in the TTCN-3 ATS, the distinct value <code>null</code> shall be passed for the return value.</p>
Effect	On invocation of this operation the SA can issue the reply to a procedure call corresponding to the signature identifier <code>signatureId</code> and the TSI port <code>tsiPortId</code> . The <code>triReply</code> operation will return <i>TRI_OK</i> on successful execution of this operation, <i>TRI_Error</i> otherwise. The SA shall indicate no error in case the value of any <i>in</i> parameter or an undefined return value is different from <code>null</code> .

5.5.4.5 triReplyBC (TE → SA)

Signature	<pre>TriStatusType triReplyBC(in TriComponentIdType componentId, in TriPortIdType tsiPortId, in TriSignatureIdType signatureId, in TriParameterListType parameterList, in TriParameterType returnValue)</pre>
In Parameters	<p><code>componentId</code> identifier of the replying test component</p> <p><code>tsiPortId</code> identifier of the test system interface port via which the reply is sent to the SUT Adaptor</p> <p><code>signatureId</code> identifier of the signature of the procedure call</p> <p><code>parameterList</code> a list of encoded parameters which are part of the indicated signature. The parameters in <code>parameterList</code> are ordered as they appear in the TTCN-3 signature declaration</p> <p><code>returnValue</code> (optional) encoded return value of the procedure call</p>
Out Parameters	n.a.
Return Value	The return status of the <code>triReplyBC</code> operation. The return status indicates the local success (<i>TRI_OK</i>) or failure (<i>TRI_Error</i>) of the operation.

Constraints	<p>This operation is called by the TE when it executes a TTCN-3 broadcast reply operation on a component port that has been mapped to a TSI port. This operation is called by the TE for all TTCN-3 reply operations if no system component has been specified for a test case, i.e., only a MTC test component is created for a test case. All <i>out</i> and <i>inout</i> procedure parameters and the return value contain encoded values. The <code>parameterList</code> contains procedure call parameters. These parameters are the parameters specified in the TTCN-3 signature template. Their encoding has to be done in the TE prior to this TRI operation call.</p> <p>If no return type has been defined for the procedure signature in the TTCN-3 ATS, the distinct value <code>null</code> shall be passed for the return value.</p>
Effect	<p>On invocation of this operation the SA can broadcast the reply to procedure calls corresponding to the signature identifier <code>signatureId</code> and the TSI port <code>tsiPortId</code>. The <code>triReplyBC</code> operation will return <i>TRI_OK</i> on successful execution of this operation, <i>TRI_Error</i> otherwise. The SA shall indicate no error in case the value of any <i>in</i> parameter or an undefined return value is different from <code>null</code>.</p>

5.5.4.6 triReplyMC (TE → SA)

Signature	<pre>TriStatusType triReplyMC(in TriComponentIdType componentId, in TriPortIdType tsiPortId, in TriAddressListType SUTaddresses, in TriSignatureIdType signatureId, in TriParameterListType parameterList, in TriParameterType returnValue)</pre>												
In Parameters	<table> <tr> <td><code>componentId</code></td> <td>identifier of the replying test component</td> </tr> <tr> <td><code>tsiPortId</code></td> <td>identifier of the test system interface port via which the reply is sent to the SUT Adaptor</td> </tr> <tr> <td><code>SUTaddresses</code></td> <td>destination addresses within the SUT</td> </tr> <tr> <td><code>signatureId</code></td> <td>identifier of the signature of the procedure call</td> </tr> <tr> <td><code>parameterList</code></td> <td>a list of encoded parameters which are part of the indicated signature. The parameters in <code>parameterList</code> are ordered as they appear in the TTCN-3 signature declaration</td> </tr> <tr> <td><code>returnValue</code></td> <td>(optional) encoded return value of the procedure call</td> </tr> </table>	<code>componentId</code>	identifier of the replying test component	<code>tsiPortId</code>	identifier of the test system interface port via which the reply is sent to the SUT Adaptor	<code>SUTaddresses</code>	destination addresses within the SUT	<code>signatureId</code>	identifier of the signature of the procedure call	<code>parameterList</code>	a list of encoded parameters which are part of the indicated signature. The parameters in <code>parameterList</code> are ordered as they appear in the TTCN-3 signature declaration	<code>returnValue</code>	(optional) encoded return value of the procedure call
<code>componentId</code>	identifier of the replying test component												
<code>tsiPortId</code>	identifier of the test system interface port via which the reply is sent to the SUT Adaptor												
<code>SUTaddresses</code>	destination addresses within the SUT												
<code>signatureId</code>	identifier of the signature of the procedure call												
<code>parameterList</code>	a list of encoded parameters which are part of the indicated signature. The parameters in <code>parameterList</code> are ordered as they appear in the TTCN-3 signature declaration												
<code>returnValue</code>	(optional) encoded return value of the procedure call												
Out Parameters	n.a.												
Return Value	The return status of the <code>triReplyMC</code> operation. The return status indicates the local success (<i>TRI_OK</i>) or failure (<i>TRI_Error</i>) of the operation.												
Constraints	<p>This operation is called by the TE when it executes a TTCN-3 multicast reply operation on a component port that has been mapped to a TSI port. This operation is called by the TE for all TTCN-3 reply operations if no system component has been specified for a test case, i.e., only a MTC test component is created for a test case. All <i>out</i> and <i>inout</i> procedure parameters and the return value contain encoded values. The <code>parameterList</code> contains procedure call parameters. These parameters are the parameters specified in the TTCN-3 signature template. Their encoding has to be done in the TE prior to this TRI operation call.</p> <p>If no return type has been defined for the procedure signature in the TTCN-3 ATS, the distinct value <code>null</code> shall be passed for the return value.</p>												

Effect	On invocation of this operation the SA can multicast the reply to procedure calls corresponding to the signature identifier <i>signatureId</i> and the TSI port <i>tsiPortId</i> . The <i>triReplyMC</i> operation will return <i>TRI_OK</i> on successful execution of this operation, <i>TRI_Error</i> otherwise. The SA shall indicate no error in case the value of any <i>in</i> parameter or an undefined return value is different from null.
---------------	--

5.5.4.7 triRaise (TE → SA)

Signature	TriStatusType triRaise(in TriComponentIdType componentId, in TriPortIdType tsiPortId, in TriAddressType SUTaddress, in TriSignatureIdType signatureId, in TriExceptionType exc)
In Parameters	<i>componentId</i> identifier of the test component raising the exception <i>tsiPortId</i> identifier of the test system interface port via which the exception is sent to the SUT Adaptor <i>SUTaddress</i> (optional) destination address within the SUT <i>signatureId</i> identifier of the signature of the procedure call which the exception is associated with <i>exc</i> the encoded exception
Out Parameters	n.a.
Return Value	The return status of the <i>triRaise</i> operation. The return status indicates the local success (<i>TRI_OK</i>) or failure (<i>TRI_Error</i>) of the operation.
Constraints	This operation is called by the TE when it executes a TTCN-3 unicast raise operation on a component port that has been mapped to a TSI port. This operation is called by the TE for all TTCN-3 raise operations if no system component has been specified for a test case, i.e., only a MTC test component is created for a test case. The encoding of the exception has to be done in the TE prior to this TRI operation call.
Effect	On invocation of this operation the SA can raise an exception to a procedure call corresponding to the signature identifier <i>signatureId</i> and the TSI port <i>tsiPortId</i> . The <i>triRaise</i> operation returns <i>TRI_OK</i> on successful execution of the operation, <i>TRI_Error</i> otherwise.

5.5.4.8 triRaiseBC (TE → SA)

Signature	TriStatusType triRaiseBC(in TriComponentIdType componentId, in TriPortIdType tsiPortId, in TriSignatureIdType signatureId, in TriExceptionType exc)
In Parameters	<i>componentId</i> identifier of the test component raising the exception <i>tsiPortId</i> identifier of the test system interface port via which the exception is sent to the SUT Adaptor <i>signatureId</i> identifier of the signature of the procedure call which the exception is associated with <i>exc</i> the encoded exception
Out Parameters	n.a.

Return Value	The return status of the <code>triRaiseBC</code> operation. The return status indicates the local success (<i>TRI_OK</i>) or failure (<i>TRI_Error</i>) of the operation.
Constraints	This operation is called by the TE when it executes a TTCN-3 broadcast raise operation on a component port that has been mapped to a TSI port. This operation is called by the TE for all TTCN-3 raise operations if no system component has been specified for a test case, i.e., only a MTC test component is created for a test case. The encoding of the exception has to be done in the TE prior to this TRI operation call.
Effect	On invocation of this operation the SA can raise and broadcast an exception to procedure calls corresponding to the signature identifier <code>signatureId</code> and the TSI port <code>tsiPortId</code> . The <code>triRaiseBC</code> operation returns <i>TRI_OK</i> on successful execution of the operation, <i>TRI_Error</i> otherwise.

5.5.4.9 triRaiseMC (TE → SA)

Signature	<code>TriStatusType triRaiseMC(in TriComponentIdType componentId, in TriPortIdType tsiPortId, in TriAddressListType SUTaddresses, in TriSignatureIdType signatureId, in TriExceptionType exc)</code>										
In Parameters	<table> <tr> <td><code>componentId</code></td> <td>identifier of the test component raising the exception</td> </tr> <tr> <td><code>tsiPortId</code></td> <td>identifier of the test system interface port via which the exception is sent to the SUT Adaptor</td> </tr> <tr> <td><code>SUTaddresses</code></td> <td>destination addresses within the SUT</td> </tr> <tr> <td><code>signatureId</code></td> <td>identifier of the signature of the procedure call which the exception is associated with</td> </tr> <tr> <td><code>exc</code></td> <td>the encoded exception</td> </tr> </table>	<code>componentId</code>	identifier of the test component raising the exception	<code>tsiPortId</code>	identifier of the test system interface port via which the exception is sent to the SUT Adaptor	<code>SUTaddresses</code>	destination addresses within the SUT	<code>signatureId</code>	identifier of the signature of the procedure call which the exception is associated with	<code>exc</code>	the encoded exception
<code>componentId</code>	identifier of the test component raising the exception										
<code>tsiPortId</code>	identifier of the test system interface port via which the exception is sent to the SUT Adaptor										
<code>SUTaddresses</code>	destination addresses within the SUT										
<code>signatureId</code>	identifier of the signature of the procedure call which the exception is associated with										
<code>exc</code>	the encoded exception										
Out Parameters	n.a.										
Return Value	The return status of the <code>triRaiseMC</code> operation. The return status indicates the local success (<i>TRI_OK</i>) or failure (<i>TRI_Error</i>) of the operation.										
Constraints	This operation is called by the TE when it executes a TTCN-3 multicast raise operation on a component port that has been mapped to a TSI port. This operation is called by the TE for all TTCN-3 raise operations if no system component has been specified for a test case, i.e., only a MTC test component is created for a test case. The encoding of the exception has to be done in the TE prior to this TRI operation call.										
Effect	On invocation of this operation the SA can raise and multicast an exception to a procedure calls corresponding to the signature identifier <code>signatureId</code> and the TSI port <code>tsiPortId</code> . The <code>triRaiseMC</code> operation returns <i>TRI_OK</i> on successful execution of the operation, <i>TRI_Error</i> otherwise.										

5.5.4.10 triEnqueueCall (SA → TE)

Signature	<pre>void triEnqueueCall(in TriPortIdType tsiPortId, in TriAddressType SUTaddress, in TriComponentIdType componentId, in TriSignatureIdType signatureId, in TriParameterListType parameterList)</pre>										
In Parameters	<table> <tr> <td><code>tsiPortId</code></td> <td>identifier of the test system interface port via which the procedure call is enqueued by the SUT Adaptor</td> </tr> <tr> <td><code>SUTaddress</code></td> <td>(optional) source address within the SUT</td> </tr> <tr> <td><code>componentId</code></td> <td>identifier of the receiving test component</td> </tr> <tr> <td><code>signatureId</code></td> <td>identifier of the signature of the procedure call</td> </tr> <tr> <td><code>parameterList</code></td> <td>a list of encoded parameters which are part of the indicated signature. The parameters in <code>parameterList</code> are ordered as they appear in the TTCN-3 signature declaration. Description of data passed as parameters to the operation from the calling entity to the called entity</td> </tr> </table>	<code>tsiPortId</code>	identifier of the test system interface port via which the procedure call is enqueued by the SUT Adaptor	<code>SUTaddress</code>	(optional) source address within the SUT	<code>componentId</code>	identifier of the receiving test component	<code>signatureId</code>	identifier of the signature of the procedure call	<code>parameterList</code>	a list of encoded parameters which are part of the indicated signature. The parameters in <code>parameterList</code> are ordered as they appear in the TTCN-3 signature declaration. Description of data passed as parameters to the operation from the calling entity to the called entity
<code>tsiPortId</code>	identifier of the test system interface port via which the procedure call is enqueued by the SUT Adaptor										
<code>SUTaddress</code>	(optional) source address within the SUT										
<code>componentId</code>	identifier of the receiving test component										
<code>signatureId</code>	identifier of the signature of the procedure call										
<code>parameterList</code>	a list of encoded parameters which are part of the indicated signature. The parameters in <code>parameterList</code> are ordered as they appear in the TTCN-3 signature declaration. Description of data passed as parameters to the operation from the calling entity to the called entity										
Out Parameters	n.a.										
Return Value	void										
Constraints	<p>This operation can be called by the SA after it has received a procedure call from the SUT. It can only be used when <code>tsiPortId</code> has been either previously mapped to a port of <code>componentId</code> or referenced in the previous <code>triExecuteTestCase</code> statement.</p> <p>In the invocation of a <code>triEnqueueCall</code> operation all <i>in</i> and <i>inout</i> procedure parameters contain encoded values.</p>										
Effect	<p>The TE can enqueue this procedure call with the signature identifier <code>signatureId</code> at the port of the component <code>componentId</code> to which the TSI port <code>tsiPortId</code> is mapped. The decoding of procedure parameters has to be done in the TE.</p> <p>The TE shall indicate no error in case the value of any <i>out</i> parameter is different from null.</p>										

5.5.4.11 triEnqueueReply (SA → TE)

Signature	<pre>void triEnqueueReply(in TriPortIdType tsiPortId, in TriAddressType SUTaddress, in TriComponentIdType componentId, in TriSignatureIdType signatureId, in TriParameterListType parameterList, in TriParameterType returnValue)</pre>
------------------	--

In Parameters	<p><code>tsiPortId</code> identifier of the test system interface port via which the reply is enqueued by the SUT Adaptor</p> <p><code>SUTaddress</code> (optional) source address within the SUT</p> <p><code>componentId</code> identifier of the receiving test component</p> <p><code>signatureId</code> identifier of the signature of the procedure call</p> <p><code>parameterList</code> a list of encoded parameters which are part of the indicated signature. The parameters in <code>parameterList</code> are ordered as they appear in the TTCN-3 signature declaration</p> <p><code>returnValue</code> (optional) encoded return value of the procedure call</p>
Out Parameters	n.a.
Return Value	void
Constraints	<p>This operation can be called by the SA after it has received a reply from the SUT. It can only be used when <code>tsiPortId</code> has been either previously mapped to a port of <code>componentId</code> or referenced in the previous <code>triExecuteTestCase</code> statement. In the invocation of a <code>triEnqueueReply</code> operation all <i>out</i> and <i>inout</i> procedure parameters and the return value contain encoded values.</p> <p>If no return type has been defined for the procedure signature in the TTCN-3 ATS, the distinct value <code>null</code> shall be used for the return value.</p>
Effect	The TE can enqueue this reply to the procedure call with the signature identifier <code>signatureId</code> at the port of the component <code>componentId</code> to which the TSI port <code>tsiPortId</code> is mapped. The decoding of the procedure parameters has to be done within the TE. The TE shall indicate no error in case the value of any <i>in</i> parameter or an undefined return value is different from <code>null</code> .

5.5.4.12 triEnqueueException (SA → TE)

Signature	<pre>void triEnqueueException(in TriPortIdType tsiPortId, in TriAddressType SUTaddress, in TriComponentIdType componentId, in TriSignatureIdType signatureId, in TriExceptionType exc)</pre>
In Parameters	<p><code>tsiPortId</code> identifier for the test system interface port via which the exception is enqueued by the SUT Adaptor</p> <p><code>SUTaddress</code> (optional) source address within the SUT</p> <p><code>componentId</code> identifier of the receiving test component</p> <p><code>signatureId</code> identifier of the signature of the procedure call which the exception is associated with</p> <p><code>exc</code> the encoded exception</p>
Out Parameters	n.a.
Return Value	void
Constraints	<p>This operation can be called by the SA after it has received a reply from the SUT. It can only be used when <code>tsiPortId</code> has been either previously mapped to a port of <code>componentId</code> or referenced in the previous <code>triExecuteTestCase</code> statement.</p> <p>In the invocation of a <code>triEnqueueException</code> operation <code>exception</code> shall contain an encoded value.</p>

Effect	The TE can enqueue this exception for the procedure call with the signature identifier <code>signatureId</code> at the port of the component <code>componentId</code> to which the TSI port <code>tsiPortId</code> is mapped. The decoding of the exception has to be done within the TE.
---------------	--

5.5.5 Miscellaneous operations

5.5.5.1 triSUTactionInformal (TE → SA)

Signature	<code>TriStatusType triSUTactionInformal(in string description)</code>
In Parameters	<code>description</code> an informal description of an action to be taken on the SUT
Out Parameters	n.a.
Return Value	The return status of the <code>triSUTactionInformal</code> operation. The return status indicates the local success (<i>TRI_OK</i>) or failure (<i>TRI_Error</i>) of the operation.
Constraints	This operation is called by the TE when it executes a TTCN-3 SUT action operation, which only contains a string.
Effect	On invocation of this operation the SA shall initiate the described actions to be taken on the SUT, e.g., turn on, initialize, or send a message to the SUT. The <code>triSUTactionInformal</code> operation returns <i>TRI_OK</i> on successful execution of the operation, <i>TRI_Error</i> otherwise. Notice that the return value of this TRI operation does not make any statement about the success or failure of the actions to be taken on the SUT.

5.5.5.2 triSUTactionTemplate (TE → SA)

The content of this clause is obsolete.

5.6 Platform interface operations

5.6.1 triPAReset (TE → PA)

Signature	<code>TriStatusType triPAReset()</code>
In Parameters	n.a.
Out Parameters	n.a.
Return Value	The return status of the <code>triPAReset</code> operation. The return status indicates the local success (<i>TRI_OK</i>) or failure (<i>TRI_Error</i>) of the operation.
Constraints	This operation can be called by the TE at any time to reset the PA.
Effect	The PA shall reset all timing activities which it is currently performing, e.g., stop all running timers, discard any pending timeouts of expired timers. The <code>triPAReset</code> operation returns <i>TRI_OK</i> in case the operation has been performed successfully, <i>TRI_Error</i> otherwise.

5.6.2 Timer operations

5.6.2.1 triStartTimer (TE → PA)

Signature	<code>TriStatusType triStartTimer(in TriTimerIdType timerId, in TriTimerDurationType timerDuration)</code>
------------------	---

In Parameters	<code>timerId</code> identifier of the timer instance <code>timerDuration</code> duration of the timer in seconds
Out Parameters	n.a.
Return Value	The return status of the <code>triStartTimer</code> operation. The return status indicates the local success (<i>TRI_OK</i>) or failure (<i>TRI_Error</i>) of the operation.
Constraints	This operation is called by the TE when a timer needs to be started.
Effect	On invocation of this operation the PA shall start the indicated timer with the indicated duration. The timer runs from the value zero (0.0) up to the maximum specified by <code>timerDuration</code> . Should the timer indicated by <code>timerId</code> already be running it is to be restarted. When the timer expires the PA will call the <code>triTimeout()</code> operation with <code>timerId</code> . The <code>triStartTimer</code> operation returns <i>TRI_OK</i> if the timer has been started successfully, <i>TRI_Error</i> otherwise.

5.6.2.2 triStopTimer (TE → PA)

Signature	<code>TriStatusType triStopTimer(in TriTimerIdType timerId)</code>
In Parameters	<code>timerId</code> identifier of the timer instance
Out Parameters	n.a.
Return Value	The return status of the <code>triStopTimer</code> operation. The return status indicates the local success (<i>TRI_OK</i>) or failure (<i>TRI_Error</i>) of the operation.
Constraints	This operation is called by the TE when a timer is to be stopped.
Effect	On invocation of this operation the PA shall use the <code>timerId</code> to stop the indicated timer instance. The stopping of an inactive timer, i.e., a timer which has not been started or has already expired, should have no effect. The <code>triStopTimer</code> operation returns <i>TRI_OK</i> if the operation has been performed successfully, <i>TRI_Error</i> otherwise. Notice that stopping an inactive timer is a valid operation. In this case <i>TRI_OK</i> shall be returned.

5.6.2.3 triReadTimer (TE → PA)

Signature	<code>TriStatusType triReadTimer(in TriTimerIdType timerId, out TriTimerDurationType elapsedTime)</code>
In Parameters	<code>timerId</code> identifier of the timer instance
Out Parameters	<code>elapsedTime</code> value of the time elapsed since the timer has been started in seconds
Return Value	The return status of the <code>triReadTimer</code> operation. The return status indicates the local success (<i>TRI_OK</i>) or failure (<i>TRI_Error</i>) of the operation.
Constraints	This operation may be called by the TE when a TTCN-3 read timer operation is to be executed on the indicated timer (see clause 5.3.1).
Effect	On invocation of this operation the PA shall use the <code>timerId</code> to access the time that elapsed since this timer was started. The return value <code>elapsedTime</code> shall be provided in seconds. The reading of an inactive timer, i.e., a timer which has not been started or already expired, shall return an elapsed time value of zero. The <code>triReadTimer</code> operation returns <i>TRI_OK</i> if the operation has been performed successfully, <i>TRI_Error</i> otherwise.

5.6.2.4 triTimerRunning (TE → PA)

Signature	TriStatusType triTimerRunning(in TriTimerIdType timerId, out boolean running)
In Parameters	timerId identifier of the timer instance
Out Parameters	running status of the timer
Return Value	The return status of the triTimerRunning operation. The return status indicates the local success (<i>TRI_OK</i>) or failure (<i>TRI_Error</i>) of the operation.
Constraints	This operation may be called by the TE when a TTCN-3 running timer operation is to be executed on the indicated timer (see clause 5.3.1).
Effect	On invocation of this operation the PA shall use the timerId to access the status of the timer. The operation sets running to the boolean value true if and only if the timer is currently running. The triTimerRunning operation returns <i>TRI_OK</i> if the status of the timer has been successfully determined, <i>TRI_Error</i> otherwise.

5.6.2.5 triTimeout (PA → TE)

Signature	void triTimeout(in TriTimerIdType timerId)
In Parameters	timerId identifier of the timer instance
Out Parameters	n.a.
Return Value	void
Constraints	This operation is called by the PA after a timer, which has previously been started using the triStartTimer operation, has expired, i.e., it has reached its maximum duration value.
Effect	The timeout with the timerId can be added to the timeout list in the TE. The implementation of this operation in the TE has to be done in such a manner that it addresses the different TTCN-3 semantics for timers defined in [ITU-T Z.164] (see also clause 5.3.1).

5.6.3 Miscellaneous operations

5.6.3.1 triExternalFunction (TE → PA)

Signature	TriStatusType triExternalFunction(in TriFunctionIdType functionId, inout TriParameterListType parameterList, out TriParameterType returnValue)
In Parameters	functionId identifier of the external function
Out Parameters	returnValue (optional) encoded return value
InOutParameters	parameterList a list of encoded parameters for the indicated function. The parameters in parameterList are ordered as they appear in the TTCN-3 function declaration.
Return Value	The return status of the triExternalFunction operation. The return status indicates the local success (<i>TRI_OK</i>) or failure (<i>TRI_Error</i>) of the operation.

Constraints	<p>This operation is called by the TE when it executes a function which is defined to be TTCN-3 external (i.e., all non-external functions are implemented within the TE).</p> <p>In the invocation of a <code>triExternalFunction</code> operation by the TE all <i>in</i> and <i>inout</i> function parameters contain encoded values. No error shall be indicated by the PA in case the value of any <i>out</i> parameter is non-null.</p>
Effect	<p>For each external function specified in the TTCN-3 ATS the PA shall implement the behaviour. On invocation of this operation the PA shall invoke the function indicated by the identifier <code>functionId</code>. It shall access the specified <i>in</i> and <i>inout</i> function parameters in <code>parameterList</code>, evaluate the external function using the values of these parameters, and compute values for <i>inout</i> and <i>out</i> parameters in <code>parameterList</code>. The operation shall then return encoded values for all <i>inout</i> and <i>out</i> function parameters and the encoded return value of the external function.</p> <p>If no return type has been defined for this external function in the TTCN-3 ATS, the distinct value <code>null</code> shall be used for the latter.</p> <p>The <code>triExternalFunction</code> operation returns <i>TRI_OK</i> if the PA completes the evaluation of the external function successfully, <i>TRI_Error</i> otherwise.</p> <p>Note that whereas all other TRI operations are considered to be non-blocking, the <code>triExternalFunction</code> operation is considered to be <i>blocking</i>. That means that the operation shall not return before the indicated external function has been fully evaluated. External functions have to be implemented carefully as they could cause deadlock of test component execution or even the entire test system implementation.</p>

6 Java language mapping

6.1 Introduction

This clause introduces the TRI Java language mapping. For efficiency reasons, a dedicated language mapping is introduced instead of using the OMG IDL to Java language.

The Java language mapping for the TTCN-3 Runtime Interface defines how the IDL definitions described in clause 5 are mapped to the Java language. The language mapping is independent of the used Java version as only basic Java language constructs are used.

6.2 Names and scopes

6.2.1 Names

Although there are no conflicts between identifiers used in the IDL definition and the Java language some naming translation rules are applied to the IDL identifiers.

- Java parameter identifiers shall start with a lower case letter, and subsequent part building the parameter identifier start with a capital letter. For example the IDL parameter identifier `SUTaddress` maps to `sutAddress` in Java.
- Java interfaces or class identifiers are omitting the trailing `Type` used in the IDL definition. For example the IDL type `TriPortIdType` maps to `TriPortId` in Java.

The resulting mapping conforms with the standard Java coding conventions.

6.2.2 Scopes

The IDL module `triInterface` is mapped to the Java package `org.etsi.ttcn3.tri`. All IDL type declarations within this module are mapped to Java classes or interface declarations within this package.

6.3 Type mapping

6.3.1 Basic type mapping

Table 3 gives an overview on how the used basic IDL types are mapped to the Java types.

Table 3 – Basic type mappings

IDL Type	Java Type
boolean	org.etsi.ttcn.tri.TriBoolean
string	java.lang.String

Other IDL basic types are not used within the IDL definition.

6.3.1.1 Boolean

The IDL `boolean` type is mapped to the interface `org.etsi.ttcn.tri.TriBoolean`, so that objects implementing this interface can act as holder objects.

The following interface is defined for `org.etsi.ttcn.tri.TriBoolean`:

```
// TriBoolean
package org.etsi.ttcn.tri;
public interface TriBoolean {
    public void setBooleanValue(boolean value);
    public boolean getBooleanValue();
}
```

6.3.1.1.1 Methods

`setBooleanValue(boolean value)`

Sets this `TriBoolean` to the boolean value `value`.

`getBooleanValue()`

Returns the boolean value represented by this `TriBoolean`.

6.3.1.2 String

The IDL `string` type is mapped to the `java.lang.String` class without range checking or bounds for characters in the string. All possible strings defined in TTCN-3 can be converted to `java.lang.String`.

6.3.2 Structured type mapping

The TRI IDL description defines user-defined types as native types. In the Java language mapping, these types are mapped to Java interfaces. The interfaces define methods and attributes being available for objects implementing this interface.

6.3.2.1 TriPortIdType

`TriPortIdType` is mapped to the following interface:

```
// TRI IDL TriPortIdType
package org.etsi.ttcn.tri;
public interface TriPortId {
    public String getPortName();
    public String getPortTypeName();
    public TriComponentId getComponent();
    public boolean isArray();
    public int getPortIndex();
}
```

6.3.2.1.1 Methods

`getPortName()`

Returns the port name as defined in the TTCN-3 specification.

`getPortTypeName()`

Returns the port type name as defined in the TTCN-3 specification.

`getComponent()`

Returns the component identifier that this `TriPortId` belongs to as defined in the TTCN-3 specification.

`isArray()`

Returns `true` if this port is part of a port array, `false` otherwise.

`getPortIndex()`

Returns the port index if this port is part of a port array starting at zero. If the port is not part of a port array, then `-1` is returned.

6.3.2.2 TriPortIdListType

`TriPortIdListType` is mapped to the following interface:

```
// TRI IDL TriPortIdListType
package org.etsi.ttcn.tri;
public interface TriPortIdList {
    public int size();
    public boolean isEmpty();
    public java.util.Enumeration getPortIds();
    public TriPortId get(int index);
}
```

6.3.2.2.1 Methods

`size()`

Returns the number of ports in this list.

`isEmpty()`

Returns `true` if this list contains no ports.

`getPortIds()`

Returns an `Enumeration` over the ports in the list. The enumeration provides the ports in the same order as they appear in the list.

`get(int index)`

Returns the `TriPortId` at the specified position.

6.3.2.3 TriComponentIdType

`TriComponentIdType` is mapped to the following interface:

```
// TRI IDL TriComponentIdType
package org.etsi.ttcn.tri;
public interface TriComponentId {
    public String getComponentId();
    public String getComponentName();
    public String getComponentTypeName();
}
```

```

public TriPortIdList getPortList();
public boolean equals(TriComponentId Component);
}

```

6.3.2.3.1 Methods

`getComponentId()`

Returns a representation of this unique component identifier.

`getComponentName()`

Returns the component name as defined in the TTCN-3 specification. If no name is provided, an empty string is returned.

`getComponentTypeName()`

Returns the component type name as defined in the TTCN-3 specification.

`getPortList()`

Returns the component's port list as defined in the TTCN-3 specification.

`equals(TriComponentId component)`

Compares `component` with this `TriComponentId` for equality. Returns `true` if and only if both components have the same representation of this unique component identifier, `false` otherwise.

6.3.2.4 TriComponentIdListType

TriComponentIdListType is mapped to the following interface:

```

// TRI IDL TriComponentIdListType
package org.etsi.ttcn.tri;
public interface TriComponentIdListType {
    public int size();
    public boolean isEmpty();
    public java.util.Enumeration getComponents();
    public TriComponentId get(int index);
    public void clear();
    public void add(TriComponentId comp);
}

```

6.3.2.4.1 Methods

`size()`

Returns the number of components in this list.

`isEmpty()`

Returns true if this list contains no components.

`getComponents()`

Returns an `Enumeration` over the components in the list. The enumeration provides the components in the same order as they appear in the list.

`get(int index)`

Returns the `TriComponentId` at the specified position.

clear()

Removes all components from this `TriComponentIdList`.

add(`TriComponentId comp`)

Adds `comp` to the end of this `TriComponentIdList`.

6.3.2.5 TriMessageType

`TriMessageType` is mapped to the following interface:

```
// TRI IDL TriMessageType
package org.etsi.ttcn.tri;
public interface TriMessage {
    public byte[] getEncodedMessage();
    public void setEncodedMessage(byte[] message);
    public boolean equals(TriMessage message);
}
```

6.3.2.5.1 Methods

getEncodedMessage()

Returns the message encoded according to the coding rules defined in the TTCN-3 specification.

setEncodedMessage(`byte[] message`)

Sets the encoded message representation of this `TriMessage` to `message`.

equals(`TriMessage message`)

Compares `message` with this `TriMessage` for equality. Returns `true` if and only if both messages have the same encoded representation, `false` otherwise.

6.3.2.6 TriAddressType

`TriAddressType` is mapped to the following interface:

```
// TRI IDL TriAddressType
package org.etsi.ttcn.tri;
public interface TriAddress {
    public byte[] getEncodedAddress();
    public void setEncodedAddress(byte[] address);
    public boolean equals(TriAddress address);
}
```

6.3.2.6.1 Methods

getEncodedAddress()

Returns the encoded address.

setEncodedAddress(`byte[] address`)

Sets the encoded address of this `TriAddress` to `address`.

equals(`TriAddress address`)

Compares `address` with this `TriAddress` for equality. Returns `true` if and only if both addresses have the same encoded representation, `false` otherwise.

6.3.2.7 TriAddressListType

TriAddressListType is mapped to the following interface:

```
// TRI IDL TriAddressListType
package org.etsi.ttcn.tri;
public interface TriAddressListType {
    public int size();
    public boolean isEmpty();
    public java.util.Enumeration getAddresses();
    public TriAddress get(int index);
    public void clear();
    public void add(TriAddress addr);
}
```

6.3.2.7.1 Methods

size()

Returns the number of components in this list.

isEmpty()

Returns true if this list contains no components.

getAddresses()

Returns an Enumeration over the components in the list. The enumeration provides the addresses in the same order as they appear in the list.

get(int index)

Returns the TriAddress at the specified position.

clear()

Removes all addresses from this TriAddressList.

add(TriAddress addr)

Adds addr to the end of this TriAddressList.

6.3.2.8 TriSignatureIdType

TriSignatureIdType is mapped to the following interface:

```
// TRI IDL TriSignatureIdType
package org.etsi.ttcn.tri;
public interface TriSignatureId {
    public String getSignatureName();
    public void setSignatureName(String sigName);
    public boolean equals(TriSignatureId sig);
}
```

6.3.2.8.1 Methods

getSignatureName()

Returns the signature identifier as defined in the TTCN-3 specification.

setSignatureName(String sigName)

Sets the signature identifier of this TriSignatureId to sigName.

```
equals(TriSignatureId sig)
```

Compares `sig` with this `TriSignatureId` for equality. Returns `true` if and only if both signatures have the same signature identifier, `false` otherwise.

6.3.2.9 TriParameterType

TriParameterType is mapped to the following interface:

```
// TRI IDL TriParameterType
package org.etsi.ttcn.tri;
public interface TriParameter {
    public String getParameterName();
    public void setParameterName(String name);
    public int getParameterPassingMode();
    public void setParameterPassingMode(int mode);
    public byte[] getEncodedParameter();
    public void setEncodedParameter(byte[] parameter);
}
```

6.3.2.9.1 Methods

```
getParameterName()
```

Returns the parameter name as defined in the TTCN-3 specification.

```
setParameterName(String name)
```

Sets the name of this `TriParameter` parameter to `name`.

```
getParameterPassingMode()
```

Returns the parameter passing mode of this parameter.

```
setParameterPassingMode(int mode)
```

Sets the parameter mode of this `TriParameter` parameter to `mode`.

```
getEncodedParameter()
```

Returns the encoded parameter representation of this `TriParameter`, or the `null` object if the parameter contains the distinct value `null` (see also clause 5.5.4.1).

```
setEncodedParameter(byte[] parameter)
```

Sets the encoded parameter representation of this `TriParameter` to `parameter`. If the distinct value `null` shall be set to indicate that this parameter holds no value, the Java `null` shall be passed as `parameter` (see also clause 5.5.4.1).

6.3.2.10 TriParameterPassingModeType

TriParameterPassingModeType is mapped to the following interface:

```
// TRI IDL TriParameterPassingModeType
package org.etsi.ttcn.tri;
public interface TriParameterPassingMode {
    public final static int TRI_IN = 0;
    public final static int TRI_INOUT = 1;
    public final static int TRI_OUT = 2;
}
```

6.3.2.10.1 Constants

TRI_IN

Will be used to indicate that a `TriParameter` is an `in` parameter.

TRI_INOUT

Will be used to indicate that a `TriParameter` is an `inout` parameter.

TRI_OUT

Will be used to indicate that a `TriParameter` is an `out` parameter.

6.3.2.11 TriParameterListType

`TriParameterListType` is mapped to the following interface:

```
// TRI IDL TriParameterListType
package org.etsi.ttcn.tri;
public interface TriParameterList {
    public int size();
    public boolean isEmpty();
    public java.util.Enumeration getParameters();
    public TriParameter get(int index);
    public void clear();
    public void add(TriParameter parameter);
}
```

6.3.2.11.1 Methods

`size()`

Returns the number of parameters in this list.

`isEmpty()`

Returns `true` if this list contains no parameters.

`getParameters()`

Returns an `Enumeration` over the parameters in the list. The enumeration provides the parameters in the same order as they appear in the list.

`get(int index)`

Returns the `TriParameter` at the specified position.

`clear()`

Removes all parameters from this `TriParameterList`.

`add(TriParameter parameter)`

Adds `parameter` to the end of this `TriParameterList`.

6.3.2.12 TriExceptionType

`TriExceptionType` is mapped to the following interface:

```
// TRI IDL TriExceptionType
package org.etsi.ttcn.tri;
public interface TriException {
    public byte[] getEncodedException();
    public void setEncodedException(byte[] exc);
    public boolean equals(TriException exc);
}
```

6.3.2.12.1 Methods

`getEncodedException()`

Returns the exception encoded according to the coding rules defined in the TTCN-3 specification.

`setEncodedException(byte[] exc)`

Sets the encoded exception representation of this `TriException` to `exc`.

`equals(TriException exc)`

Compares `exc` with this `TriException` for equality. Returns `true` if and only if both exceptions have the same encoded representation, `false` otherwise.

6.3.2.13 TriTimerIdType

`TriTimerIdType` is mapped to the following interface:

```
// TRI IDL TriTimerIdType
package org.etsi.ttcn.tri;
public interface TriTimerId {
    public String getTimerName();
    public boolean equals(TriTimerId timer);
}
```

6.3.2.13.1 Methods

`getTimerName()`

Returns the name of this timer identifier as defined in the TTCN-3 specification. In case of implicit timers the result is implementation dependent (see clause 4.1.2).

`equals(TriTimerId timer)`

Compares `timer` with this `TriTimerId` for equality. Returns `true` if and only if both timer identifiers represent the same timer, `false` otherwise.

6.3.2.14 TriTimerDurationType

`TriTimerDurationType` is mapped to the following interface:

```
// TRI IDL TriTimerDurationType
package org.etsi.ttcn.tri;
public interface TriTimerDuration {
    public double getDuration();
    public void setDuration(double duration);
    public boolean equals(TriTimerDuration duration);
}
```

6.3.2.14.1 Methods

`getDuration()`

Returns the duration of a timer as double.

`setDuration(double duration)`

Sets the duration of this `TriTimerDuration` to `duration`.

```
equals(TriTimerDuration duration)
```

Compares `duration` with this `TriTimerDuration` for equality. Returns `true` if and only if they have the same duration, `false` otherwise.

6.3.2.15 TriFunctionIdType

TriFunctionIdType is mapped to the following interface:

```
// TRI IDL TriFunctionIdType
package org.etsi.ttcn.tri;
public interface TriFunctionId {
    public String toString();
    public String getFunctionName();
    public boolean equals(TriFunctionId fun);
}
```

6.3.2.15.1 Methods

```
toString()
```

Returns the string representation of the function as defined in the TTCN-3 specification.

```
getFunctionName()
```

Returns the function identifier as defined in the TTCN-3 specification.

```
equals(TriFunctionId fun)
```

Compares `fun` with this `TriFunctionId` for equality. Returns `true` if and only if both functions have the same function identifier, `false` otherwise.

6.3.2.16 TriTestCaseIdType

TriTestCaseIdType is mapped to the following interface:

```
// TRI IDL TriTestCaseIdType
package org.etsi.ttcn.tri;
public interface TriTestCaseId {
    public String toString();
    public String getTestCaseName();
    public boolean equals(TriTestCaseId tc);
}
```

6.3.2.16.1 Methods

```
toString()
```

Returns the string representation of the test case as defined in the TTCN-3 specification.

```
getTestCaseName()
```

Returns the test case identifier as defined in the TTCN-3 specification.

```
equals(TriTestCaseId tc)
```

Compares `tc` with this `TriTestCaseId` for equality. Returns `true` if and only if both test cases have the same test case identifier, `false` otherwise.

6.3.2.17 TriActionTemplateType

The content of this clause is obsolete.

6.3.2.18 TriStatusType

TriStatusType is mapped to the following interface:

```
// TriStatusType
package org.etsi.ttcn.tri;
public interface TriStatus {
    public final static int TRI_OK = 0;
    public final static int TRI_ERROR = -1;
    public String toString();
    public int getStatus();
    public void setStatus(int status);
    public boolean equals(TriStatus status);
}
```

6.3.2.18.1 Methods

`toString()`

Returns the string representation of the status.

`getStatus()`

Returns the status of this `TriStatus`.

`setStatus(int status)`

Sets the status of this `TriStatus`.

`equals(TriStatus status)`

Compares `status` with this `TriStatus` for equality. Returns `true` if and only if they have the same status, `false` otherwise.

6.4 Constants

Within this Java language mapping constants have been specified. All constants are defined `public final static` and are accessible from every object from every package. The constants defined within this clause are not defined with the IDL clause. Instead they result from the specification of the TRI IDL types marked as native.

The following constants can be used to determine the parameter passing mode of TTCN-3 parameters (see also clause 6.3.2.10):

- `org.etsi.ttcn.tri.TriParameterPassingMode.TRI_IN;`
- `org.etsi.ttcn.tri.TriParameterPassingMode.TRI_INOUT;`
- `org.etsi.ttcn.tri.TriParameterPassingMode.TRI_OUT.`

The values of instances of these constants shall reflect the parameter passing mode defined in the TTCN-3 procedure signatures.

For the distinct parameter value `null`, the encoded parameter value shall be set to Java `null`.

The following constants shall be used to indicate the local success of a method (see also clause 6.3.2.18):

- `org.etsi.ttcn.tri.TriStatus.TRI_OK;`
- `org.etsi.ttcn.tri.TriStatus.TRI_ERROR.`

6.5 Mapping of interfaces

The TRI IDL definition defines two interfaces, the `triCommunication` and the `triPlatform` interface. As the operations are defined for different directions within this interface, i.e., some

operations can only be called by the TTCN-3 Executable (TE) on the System Adaptor (SA) while others can only be called by the SA on the TE. This is reflected by dividing the TRI IDL interfaces into two sub-interfaces, each suffixed by the called entity.

Table 4 – Sub-interfaces

Calling/Called	TE	SA	PA
TE	–	TriCommunicationSA	triPlatformPA
SA	TriCommunicationTE	–	–
PA	TriPlatformTE	–	–

All methods defined in this interfaces should behave as defined in clause 5.

6.5.1 Out and InOut parameter passing mode

The following IDL types are used in out or inout parameter passing mode:

- TriParameter.
- TriParameterList.
- TriBoolean.
- TriTimerDuration.

In case they are used in out or inout parameter passing mode, objects of the respective class will be passed with the method call. The called entity can then access methods to set the return values.

6.5.2 triCommunication interface

The `triCommunication` interface is divided into two sub-interfaces, the `triCommunicationSA` interface, defining calls from the TE to the SA and the `triCommunicationTE` interface, defining calls from the SA to the TE.

6.5.2.1 triCommunicationSA

The `triCommunicationSA` interface is mapped to the following interface:

```
// TriCommunication
// TE -> SA
package org.etsi.ttcn.tri;
public interface TriCommunicationSA {
    // Reset Operation
    // Ref: TRI-Definition 5.5.1
    TriStatus triSAReset();

    // Connection handling operations
    // Ref: TRI-Definition 5.5.2.1
    public TriStatus triExecuteTestCase(TriTestCaseId
        testCaseId, TriPortIdList tsiPorts);
    // Ref: TRI-Definition 5.5.2.2
    public TriStatus triMap(TriPortId compPortId, TriPortId tsiPortId);
    // Ref: TRI-Definition 5.5.2.3
    public TriStatus triUnmap(TriPortId compPortId, TriPortId tsiPortId);
    // Ref: TRI-Definition 5.5.2.4
    public TriStatus triEndTestCase();

    // Message based communication operations
    // Ref: TRI-Definition 5.5.3.1
    public TriStatus triSend(TriComponentId componentId, TriPortId tsiPortId,
        TriAddress SUTAddress, TriMessage sendMessage);
    // Ref: TRI-Definition 5.5.3.2
    public TriStatus triSendBC(TriComponentId componentId, TriPortId tsiPortId,
        TriMessage sendMessage);
    // Ref: TRI-Definition 5.5.3.3
    public TriStatus triSendMC(TriComponentId componentId, TriPortId tsiPortId,
        TriAddressList SUTAddresses, TriMessage sendMessage);
}
```

```

// Procedure based communication operations
// Ref: TRI-Definition 5.5.4.1
public TriStatus triCall(TriComponentId componentId,
    TriPortId tsiPortId, TriAddress sutAddress,
    TriSignatureId signatureId, TriParameterList parameterList);
// Ref: TRI-Definition 5.5.4.2
public TriStatus triCallBC(TriComponentId componentId,
    TriPortId tsiPortId,
    TriSignatureId signatureId, TriParameterList parameterList);
// Ref: TRI-Definition 5.5.4.3
public TriStatus triCallMC(TriComponentId componentId,
    TriPortId tsiPortId, TriAddressList sutAddresses,
    TriSignatureId signatureId, TriParameterList parameterList);

// Ref: TRI-Definition 5.5.4.4
public TriStatus triReply(TriComponentId componentId,
    TriPortId tsiPortId, TriAddress sutAddress,
    TriSignatureId signatureId, TriParameterList parameterList,
    TriParameter returnValue);
// Ref: TRI-Definition 5.5.4.5
public TriStatus triReplyBC(TriComponentId componentId,
    TriPortId tsiPortId,
    TriSignatureId signatureId, TriParameterList parameterList,
    TriParameter returnValue);
// Ref: TRI-Definition 5.5.4.6
public TriStatus triReplyMC(TriComponentId componentId,
    TriPortId tsiPortId, TriAddressList sutAddresses,
    TriSignatureId signatureId, TriParameterList parameterList,
    TriParameter returnValue);

// Ref: TRI-Definition 5.5.4.7
public TriStatus triRaise(TriComponentId componentId, TriPortId tsiPortId,
    TriAddress sutAddress, TriSignatureId signatureId, TriException exc);
// Ref: TRI-Definition 5.5.4.8
public TriStatus triRaiseBC(TriComponentId componentId,
    TriPortId tsiPortId, TriSignatureId signatureId, TriException exc);
// Ref: TRI-Definition 5.5.4.9
public TriStatus triRaiseMC(TriComponentId componentId, TriPortId tsiPortId,
    TriAddressList sutAddresses,
    TriSignatureId signatureId,
    TriException exc);

// Miscellaneous operations
// Ref: TRI-Definition 5.5.5.1
public TriStatus triSutActionInformal(String description);
}

```

6.5.2.2 triCommunicationTE

The triCommunicationTE interface is mapped to the following interface:

```

// TriCommunication
// SA -> TE
package org.etsi.ttcn.tri;
public interface TriCommunicationTE {
    // Message based communication operations
    // Ref: TRI-Definition 5.5.3.4
    public void triEnqueueMsg(TriPortId tsiPortId,
        TriAddress sutAddress, TriComponentId componentId,
        TriMessage receivedMessage);

    // Procedure based communication operations
    // Ref: TRI-Definition 5.5.4.10
    public void triEnqueueCall(TriPortId tsiPortId,
        TriAddress SUTaddress, TriComponentId componentId,
        TriSignatureId signatureId, TriParameterList parameterList );

    // Ref: TRI-Definition 5.5.4.11
    public void triEnqueueReply(TriPortId tsiPortId, TriAddress SUTaddress,
        TriComponentId componentId, TriSignatureId signatureId,
        TriParameterList parameterList, TriParameter returnValue);

    // Ref: TRI-Definition 5.5.4.12
    public void triEnqueueException(TriPortId tsiPortId,
        TriAddress sutAddress, TriComponentId componentId,
        TriSignatureId signatureId, TriException exc);
}

```

6.5.3 triPlatform interface

The `triPlatform` interface is divided into two sub-interfaces, the `triPlatformPA` interface, defining calls from the TE to the PA and the `triPlatformTE` interface, defining calls from the PA to the TE.

6.5.3.1 TriPlatformPA

The `triPlatformPA` interface is mapped to the following interface:

```
// TriPlatform
// TE -> PA
package org.etsi.ttcn.tri;
public interface TriPlatformPA {
    // Ref: TRI-Definition 5.6.1
    public TriStatus triPAREset();

    // Timer handling operations
    // Ref: TRI-Definition 5.6.2.1
    public TriStatus triStartTimer(TriTimerId timerId,
        TriTimerDuration timerDuration);

    // Ref: TRI-Definition 5.6.2.2
    public TriStatus triStopTimer(TriTimerId timerId);

    // Ref: TRI-Definition 5.6.2.3
    public TriStatus triReadTimer(TriTimerId timerId,
        TriTimerDuration elapsedTime);

    // Ref: TRI-Definition 5.6.2.4
    public TriStatus triTimerRunning(TriTimerId timerId,
        TriBoolean running);

    // Miscellaneous operations

    // Ref: TRI-Definition 5.6.3.1
    public TriStatus triExternalFunction(TriFunctionId functionId,
        TriParameterList parameterList, TriParameter returnValue);
}
```

6.5.3.2 TriPlatformTE

The `triPlatformTE` interface is mapped to the following Java interface:

```
// TriPlatform
// PA -> TE
package org.etsi.ttcn.tri;
public interface TriPlatformTE {
    // Ref: TRI-Definition 5.6.2.5
    public void triTimeout(TriTimerId timerId);
}
```

6.6 Optional parameters

Clause 5.4 defines that a reserved value shall be used to indicate the absence of an optional parameter. For the Java language mapping the Java `null` value shall be used to indicate the absence of an optional value. For example, if in the `triSend` operation the address parameter shall be omitted, the operation invocation shall be `triSend(componentId, tsiPortId, null, sendMessage)`.

6.7 TRI initialization

All methods are non-static, i.e., operations can only be called on objects. As this Recommendation does not define concrete implementation strategies of TE, SA and PA, the mechanism how the TE, the SA, or the PA get to know the handles on the respective objects is out of scope of this Recommendation.

Tool vendors shall provide methods to the developers of SA and PA to register the TE, SA and PA to their respective communication partner.

6.8 Error handling

Beside the error handling as defined in clause 5.2, no additional error handling is defined within this Java language mapping. In particular, no exception handling mechanisms are defined.

7 ANSI C language mapping

7.1 Introduction

This clause defines the TRI ANSI-C language mapping for the abstract data types specified in clause 5.3. For basic IDL types, the mapping conforms to OMG recommendations.

7.2 Names and scopes

C parameter identifiers shall start with a lower case letter, and subsequent part building the parameter identifier start with a capital letter. For example, the IDL parameter `SUTaddress` maps to `sutAddress` in C.

Abstract data type identifiers in C are omitting the trailing `Type` used in the IDL definition. For example the IDL type `TriPortIdType` maps to `TriPortId` in C.

Older C specifications have restricted the identifier uniqueness to the most significant 8 characters. Nevertheless, the recent ANSI-C specifications have moved this limitation to the 31 most significant characters. Aside from this issue, no naming or scope conflicts have been identified in this mapping.

7.2.1 Abstract type mapping

TRI ADT	ANSI C Representation	Notes and comments
<code>TriAddress</code>	<code>BinaryString</code>	
<code>TriAddressList</code>	<pre>typedef struct TriAddressList { TriAddress** addrList; long int length; } TriAddressList;</pre>	NOTE 1 – No special values mark the end of <code>addrList []</code> . The <code>length</code> field shall be used to traverse this array properly.

TRI ADT	ANSI C Representation	Notes and comments
TriComponentId	typedef struct TriComponentId { BinaryString compInst; String compName; QualifiedName compType; } TriComponentId;	NOTE 2 – compInst is for component instance.
TriComponentIdList	typedef struct TriComponentIdList { TriComponentId** compIdList; long int length; } TriComponentIdList;	NOTE 3 – No special values mark the end of compIdList []. The length field shall be used to traverse this array properly.
TriException	BinaryString	
TriFunctionId	QualifiedName	
TriMessage	BinaryString	
TriParameterList	typedef struct TriParameterList { TriParameter** parList; long int length; } TriParameterList;	NOTE 4 – No special values mark the end of parList. The length field shall be used to traverse this array properly.
TriParameter	typedef struct TriParameter { BinaryString par; TriParameterPassingMode mode; } TriParameter;	
TriParameterPassingMode	typedef enum { TRI_IN = 0, TRI_INOUT = 1, TRI_OUT = 2 } TriParameterPassingMode;	NOTE 5 – The values of instances of this type shall reflect the parameter passing mode defined in the corresponding TTCN-3 procedure signatures.
TriPortIdList	typedef struct TriPortIdList { TriPortId** portIdList; long int length; } TriPortIdList;	NOTE 6 – No special values mark the end of portIdList []. The length field shall be used to traverse this array properly.
TriPortId	typedef struct TriPortId { TriComponentId compInst; char* portName; long int portIndex; QualifiedName portType; void* aux; } TriPortId;	NOTE 7 – compInst is for component instance. NOTE 8 – For a singular (non-array) declaration, the portIndex value should be –1. NOTE 9 – The aux field is for future extensibility of TRI functionality.
TriSignatureId	QualifiedName	
TriStatus	long int #define TRI_ERROR -1 #define TRI_OK 0	NOTE 10 – All negative values are reserved for future extension of TRI functionality.
TriTestCaseId	QualifiedName	
TriTimerDuration	Double	

TRI ADT	ANSI C Representation	Notes and comments
TriTimerId	BinaryString	NOTE 11 – Pending ETSI statement on timer and snapshot semantics may influence future representation.

7.2.2 ANSI C type definitions

C ADT	Type definition	Notes and comments
BinaryString	<pre>typedef struct BinaryString { unsigned char* data; long int bits; void* aux; } BinaryString;</pre>	<p>NOTE 1 – data is a non-null-terminated string.</p> <p>NOTE 2 – bits is the number of bits used in data. Bits value –1 is used to denote omitted value.</p> <p>NOTE 3 – The aux field is for future extensibility of TRI functionality.</p>
QualifiedName	<pre>typedef struct QualifiedName { char* moduleName; char* objectName; void* aux; } QualifiedName;</pre>	<p>NOTE 4 – The moduleName and objectName fields are the TTCN-3 identifiers literally.</p> <p>NOTE 5 – The aux field is for future extensibility of TRI functionality.</p>

7.2.3 IDL type mapping

IDL type	ANSI C Representation	Notes and comments
Boolean	unsigned char	From OMG IDL to C++ mapping
String	char*	From OMG IDL to C++ mapping

7.2.4 TRI operation mapping

IDL Representation	ANSI C Representation
TriStatusType triSAReset()	TriStatus triSAReset()
TriStatusType triExecuteTestCase (in TriTestCaseIdType testCaseId, in TriPortIdListType tsiPortList)	TriStatus triExecuteTestCase (const TriTestCaseId* testCaseId, const TriPortIdList* tsiPortList)
TriStatusType triMap (in TriPortIdType compPortId, in TriPortIdType tsiPortId)	TriStatus triMap (const TriPortId* compPortId, const TriPortId* tsiPortId)
TriStatusType triUnmap (in TriPortIdType compPortId, in TriPortIdType tsiPortId)	TriStatus triUnmap (const TriPortId* compPortId, const TriPortId* tsiPortId)
TriStatusType triEndTestCase()	TriStatus triEndTestCase()
TriStatusType triSend (in TriComponentIdType componentId, in TriPortIdType tsiPortId, in TriAddressType sutAddress, in TriMessageType sendMessage)	TriStatus triSend (const TriComponentId* componentId, const TriPortId* tsiPortId, const TriAddress* sutAddress, const TriMessage* sendMessage)
TriStatusType triSendBC (in TriComponentIdType componentId, in TriPortIdType tsiPortId, in TriMessageType sendMessage)	TriStatus triSendBC (const TriComponentId* componentId, const TriPortId* tsiPortId, const TriMessage* sendMessage)

IDL Representation	ANSI C Representation
TriStatusType triSendMC (in TriComponentIdType componentId, in TriPortIdType tsiPortId, in TriAddressListType SUTaddresses, in TriMessageType sendMessage)	TriStatus triSendMC (const TriComponentId* componentId, const TriPortId* tsiPortId, const TriAddressList* sutAddresses, const TriMessage* sendMessage)
void triEnqueueMsg (in TriPortIdType tsiPortId, in TriAddressType SUTaddress, in TriComponentIdType componentId, in TriMessageType receivedMessage)	void triEnqueueMsg (const TriPortId* tsiPortId, const TriAddress* sutAddress, const TriComponentId* componentId, const TriMessage* receivedMessage)
TriStatusType triCall (in TriComponentIdType componentId, in TriPortIdType tsiPortId, in TriAddressType SUTaddress, in TriSignatureIdType signatureId, in TriParameterListType parameterList)	TriStatus triCall (const TriComponentId* componentId, const TriPortId* tsiPortId, const TriAddress* sutAddress, const TriSignatureId* signatureId, const TriParameterList* parameterList)
TriStatusType triCallBC (in TriComponentIdType componentId, in TriPortIdType tsiPortId, in TriSignatureIdType signatureId, in TriParameterListType parameterList)	TriStatus triCallBC (const TriComponentId* componentId, const TriPortId* tsiPortId, const TriSignatureId* signatureId, const TriParameterList* parameterList)
TriStatusType triCallMC (in TriComponentIdType componentId, in TriPortIdType tsiPortId, in TriAddressListType SUTaddresses, in TriSignatureIdType signatureId, in TriParameterListType parameterList)	TriStatus triCallMC (const TriComponentId* componentId, const TriPortId* tsiPortId, const TriAddressList* sutAddresses, const TriSignatureId* signatureId, const TriParameterList* parameterList)
TriStatusType triReply (in TriComponentIdType componentId, in TriPortIdType tsiPortId, in TriAddressType SUTaddress, in TriSignatureIdType signatureId, in TriParameterListType parameterList, in TriParameterType returnValue)	TriStatus triReply (const TriComponentId* componentId, const TriPortId* tsiPortId, const TriAddress* sutAddress, const TriSignatureId* signatureId, const TriParameterList* parameterList, const TriParameter* returnValue)
TriStatusType triReplyBC (in TriComponentIdType componentId, in TriPortIdType tsiPortId, in TriSignatureIdType signatureId, in TriParameterListType parameterList, in TriParameterType returnValue)	TriStatus triReplyBC (const TriComponentId* componentId, const TriPortId* tsiPortId, const TriSignatureId* signatureId, const TriParameterList* parameterList, const TriParameter* returnValue)
TriStatusType triReplyMC (in TriComponentIdType componentId, in TriPortIdType tsiPortId, in TriAddressListType SUTaddresses, in TriSignatureIdType signatureId, in TriParameterListType parameterList, in TriParameterType returnValue)	TriStatus triReplyMC (const TriComponentId* componentId, const TriPortId* tsiPortId, const TriAddressList* sutAddresses, const TriSignatureId* signatureId, const TriParameterList* parameterList, const TriParameter* returnValue)
TriStatusType triRaise (in TriComponentIdType componentId, in TriPortIdType tsiPortId, in TriAddressType SUTaddress, in TriSignatureIdType signatureId, in TriExceptionType exc)	TriStatus triRaise (const TriComponentId* componentId, const TriPortId* tsiPortId, const TriAddress* sutAddress, const TriSignatureId* signatureId, const TriException* exception)

IDL Representation	ANSI C Representation
TriStatusType triRaiseBC (in TriComponentIdType componentId, in TriPortIdType tsiPortId, in TriSignatureIdType signatureId, in TriExceptionType exc)	TriStatus triRaiseBC (const TriComponentId* componentId, const TriPortId* tsiPortId, const TriSignatureId* signatureId, const TriException* exception)
TriStatusType triRaiseMC (in TriComponentIdType componentId, in TriPortIdType tsiPortId, in TriAddressListType SUTaddresses, in TriSignatureIdType signatureId, in TriExceptionType exc)	TriStatus triRaiseMC (const TriComponentId* componentId, const TriPortId* tsiPortId, const TriAddressList* sutAddresses, const TriSignatureId* signatureId, const TriException* exception)
void triEnqueueCall (in TriPortIdType tsiPortId, in TriAddressType SUTaddress, in TriComponentId componentId, in TriSignatureIdType signatureId, in TriParameterListType parameterList)	void triEnqueueCall (const TriPortId* tsiPortId, const TriAddress* sutAddress, const TriComponentId* componentId, const TriSignatureId* signatureId, const TriParameterList* parameterList)
void triEnqueueReply (in TriPortIdType tsiPortId, in TriAddressType SUTaddress, in TriComponentIdType componentId, in TriSignatureIdType signatureId, in TriParameterListType parameterList, in TriParameterType returnValue)	void triEnqueueReply (const TriPortId* tsiPortId, const TriAddress* sutAddress, const TriComponentId* componentId, const TriSignatureId* signatureId, const TriParameterList* parameterList, const TriParameter* returnValue)
void triEnqueueException (in TriPortIdType tsiPortId, in TriAddressType SUTaddress, in TriComponentIdType componentId, in TriSignatureIdType signatureId, in TriExceptionType exc)	void triEnqueueException (const TriPortId* tsiPortId, const TriAddress* sutAddress, const TriComponentId* componentId, const TriSignatureId* signatureId, const TriException* exception)
TriStatusType triSUTActionInformal (in string description)	TriStatus triSUTActionInformal (const char* description)
TriStatusType triPAReset()	TriStatus triPAReset()
TriStatusType triStartTimer (in TriTimerIdType timerId, in TriTimerDurationType timerDuration)	TriStatus triStartTimer (const TriTimerId* timerId, TriTimerDuration timerDuration)
TriStatusType triStopTimer (in TriTimerIdType timerId)	TriStatus triStopTimer (const TriTimerId* timerId)
TriStatusType triReadTimer (in TriTimerIdType timerId, out TriTimerDurationType elapsedTime)	TriStatus triReadTimer (const TriTimerId* timerId, TriTimerDuration* elapsedTime)
TriStatusType triTimerRunning (in TriTimerIdType timerId, out boolean running)	TriStatus triTimerRunning (const TriTimerId* timerId, unsigned char* running)
void triTimeout (in TriTimerIdType timerId)	void triTimeout (const TriTimerId* timerId)
TriStatusType triExternalFunction (in TriFunctionIdType functionId, inout TriParameterListType parameterList, out TriParameterType returnValue)	TriStatus triExternalFunction (const TriFunctionId* functionId, TriParameterList* parameterList, TriParameter* returnValue)

7.3 Memory management

The content of this clause is obsolete.

7.4 Error handling

No error handling has been defined for this mapping.

8 Use scenarios

This clause contains use scenarios that should help users of the TRI and tool vendors providing the TRI understand the semantics of the operations defined within this Recommendation.

Three scenarios are defined in terms of Message Sequence Charts (MSC). A scenario consists of a TTCN-3 code fragment that uses TTCN-3 communication functions to the SUT as well as timer handling functions. The MSC shows the interactions between the TE, SA, and PA entities together with the SUT.

Please note that the TTCN-3 fragments are not complete, as the main objective of the fragments are the usage of dynamic behaviour. All of the presented scenarios use a common preamble sequence of TRI operations shown in Figure 2.

Notice that the MSCs presented in this clause use message pairs to model each TRI operation. The MSC message `triMap` followed by `triMapOK` denotes, for example, that the TRI operation `triMap` has been invoked by the TE and it returns successfully from the SA. TRI operation calls are shown using abstract types and values, and are intended to serve only for illustration purposes. The concrete representation of these parameters in a particular target language is defined in the respective language mappings.

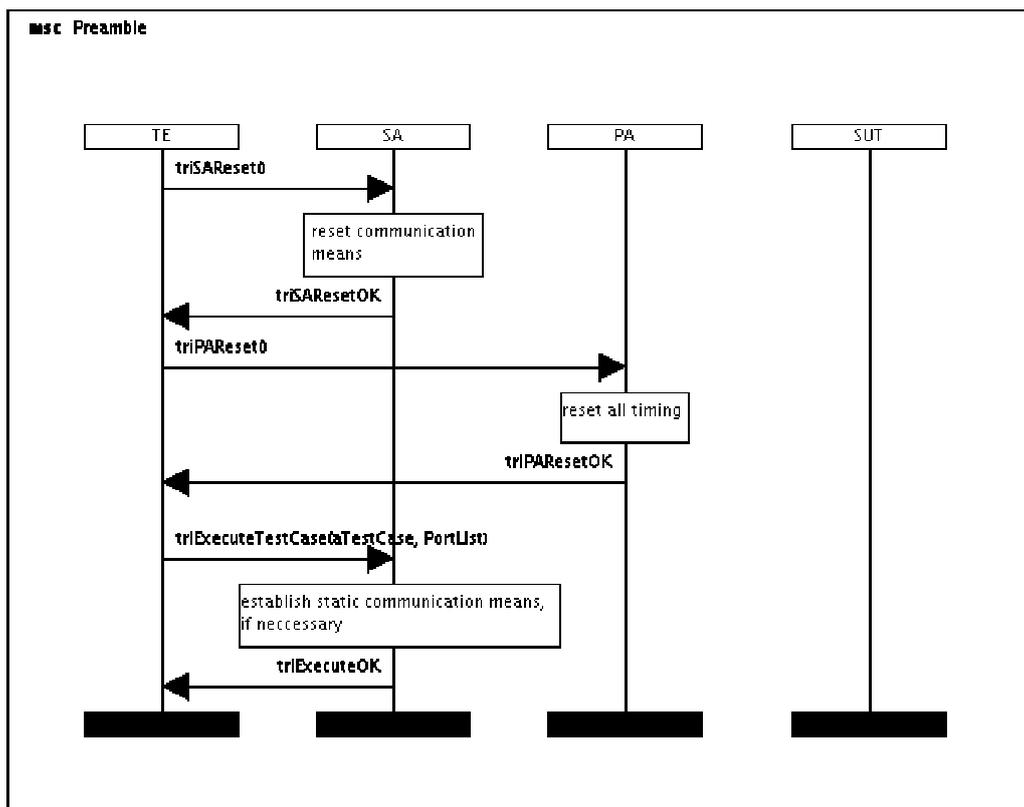


Figure 2 – Common MSC preamble

8.1 First scenario

The first scenario shows some TTCN-3 timer operations, i.e., start and timer running, message based communication operations, i.e., send and receive, as well as connection handling operations, i.e., map and unmap.

8.1.1 TTCN-3 fragment

```
module triScenario1
{
  external function MyFunction();

  type port PortTypeMsg message { inout integer }

  type component MyComponent {
    port PortTypeMsg MyPort;
    timer MyTimer
  }

  type component MyTSI {
    port PortTypeMsg PC01;
  }

  testcase scenario1() runs on MyComponent system MyTSI
  {
    MyPort.clear;
    MyPort.start;
    MyTimer.start(2);

    map(MyComponent: MyPort, system: PC01);
    MyPort.send (integer : 5);
    if (MyTimer.running)
    {
      MyPort.receive(integer:7);
    }
    else
    {
      MyFunction();
    }
    unmap(MyComponent: MyPort, system:PC01);
    MyPort.stop;
  }

  control {
    execute( scenario1() );
  }
}
```

8.1.2 Message sequence chart

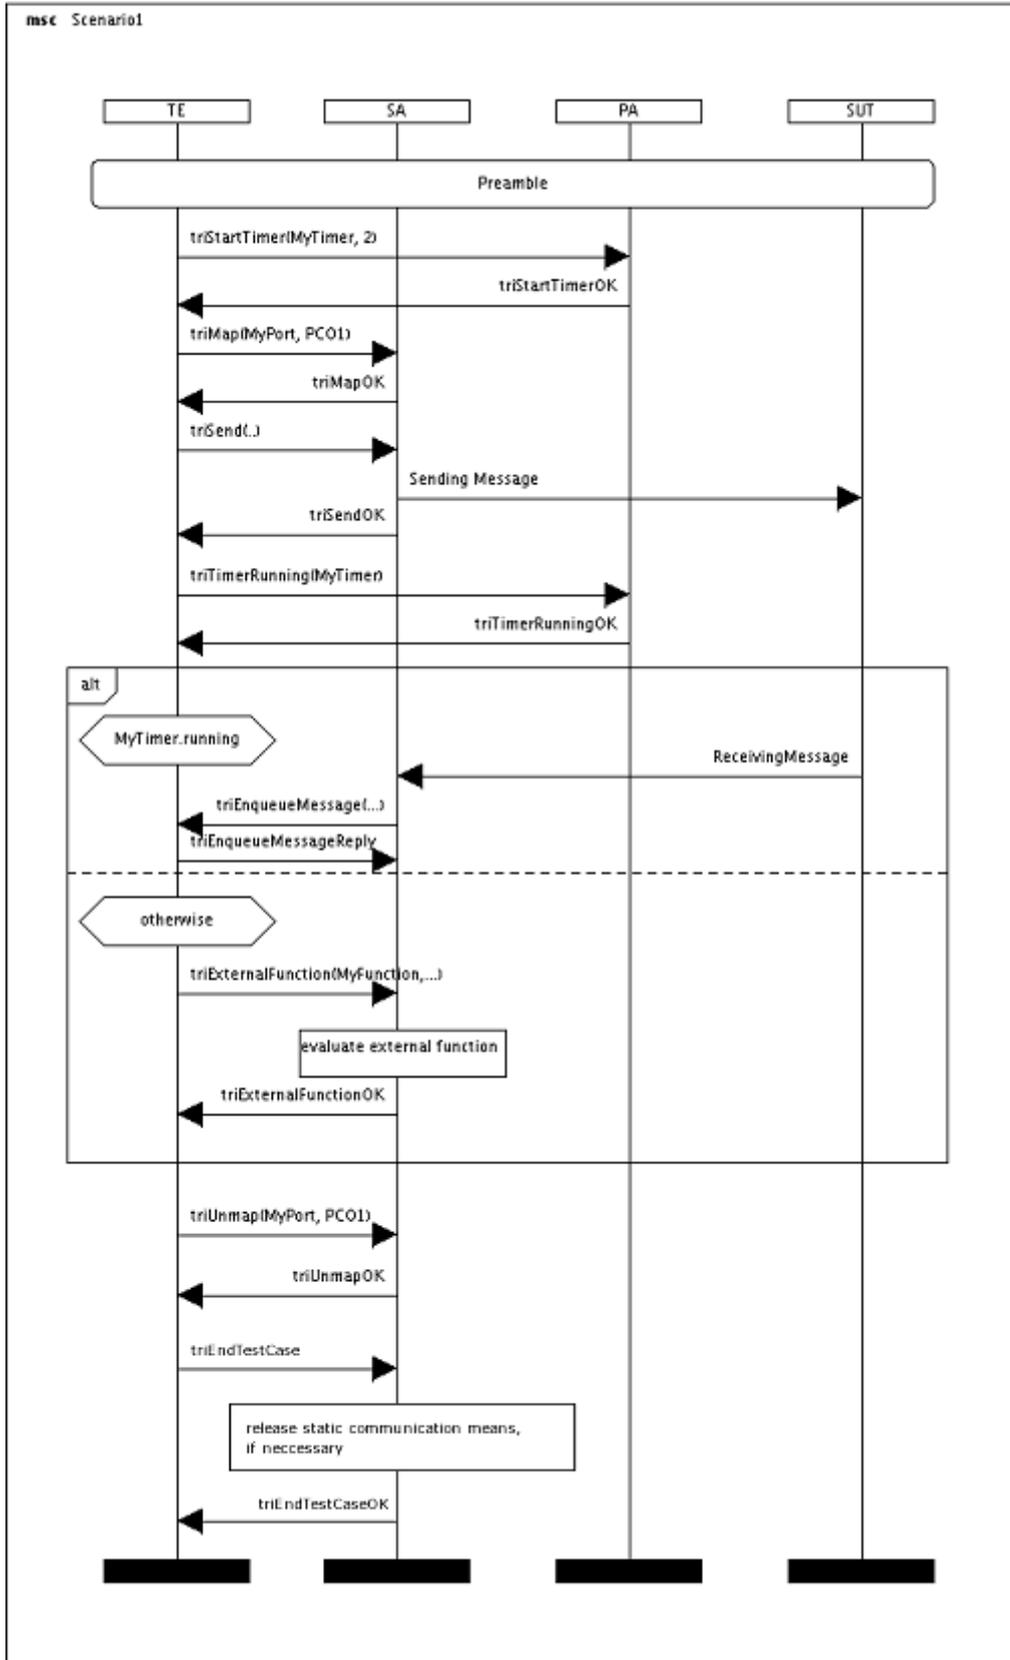


Figure 3 – Use Scenario 1

8.2 Second scenario

The second example shows a similar scenario which also uses timed procedure based communication operations which are initiated by the test component `MyComponent`. In this example `MyComponent` is assumed to run as the MTC.

8.2.1 TTCN-3 fragment

```
module triScenario2
{
  signature MyProc ( in float par1, inout float par2)
    exception(MyExceptionType);

  type record MyExceptionType { FieldType1 par1, FieldType2 par2 }

  type port PortTypeProc procedure { out MyProc }

  type component MyComponent {
    port PortTypeProc MyPort;
    timer MyTimer = 7
  }

  testcase scenario2() runs on MyComponent
  {
    var float MyVar;

    MyPort.clear;
    MyPort.start;
    MyTimer.start;

    MyVar := MyTimer.read;

    if (MyVar>5.0) {
      MyPort.call (MyProc:{MyVar, 5.7}, 5);
      alt {
        [] MyPort.getreply(MyProc:{-,MyVar*5}) {}
        [] MyPort.catch (MyProc, MyExceptionType:* ) {}
        [] MyPort.catch (timeout) {}
      }
    }
  }

  MyTimer.stop;
  MyPort.stop;
}

control {
  execute( scenario2() );
}
}
```

8.2.2 Message sequence chart

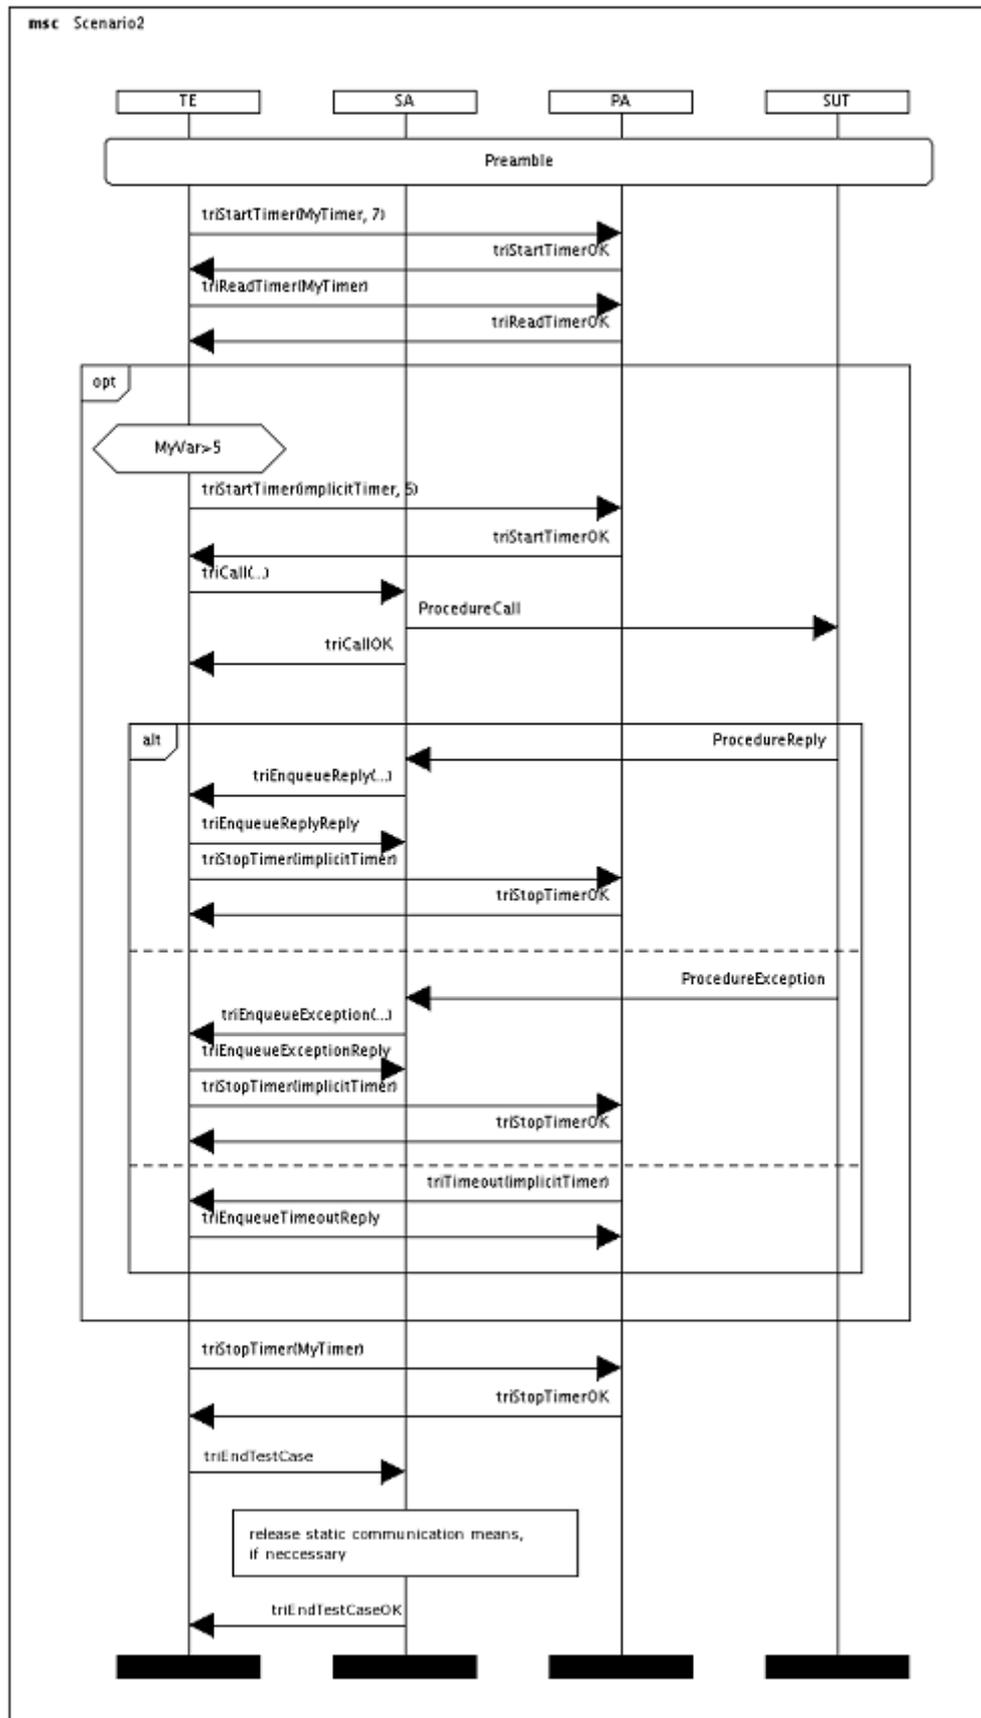


Figure 4 – Use Scenario 2

8.3 Third scenario

Use scenario 3 shows the reception of a procedure call as well as a reply and raising of an exception based on this received call. Again MyComponent is assumed to run as the MTC. FieldType1, FieldType2, p1, and p2 are assumed to be defined elsewhere.

8.3.1 TTCN-3 fragment

```
module triScenario3
{
  signature MyProc ( in float par1, inout float par2)
    exception(MyExceptionType);

  type record MyExceptionType { FieldType1 par1, FieldType2 par2 }

  type port PortTypeProc procedure { in MyProc }

  type component MyComponent {
    port PortTypeProc MyPort;
    timer MyTimer = 3
  }

  testcase scenario3(integer x) runs on MyComponent
  {
    MyPort.start;
    MyTimer.start;
    alt
    {
      [] MyPort.getcall(MyProc:{5.0, 6.0})
      {
        MyTimer.stop;
      }
      [x>5] MyTimer.timeout
      {
        MyPort.reply(MyProc:{-, 30.0});
      }
      [x<=5] MyTimer.timeout
      {
        MyPort.raise(MyProc, MyExceptionType:{p1, p2} );
      }
    }
    MyPort.stop;
  }

  control {
    execute( scenario3(4) );
  }
}
```

8.3.2 Message sequence chart

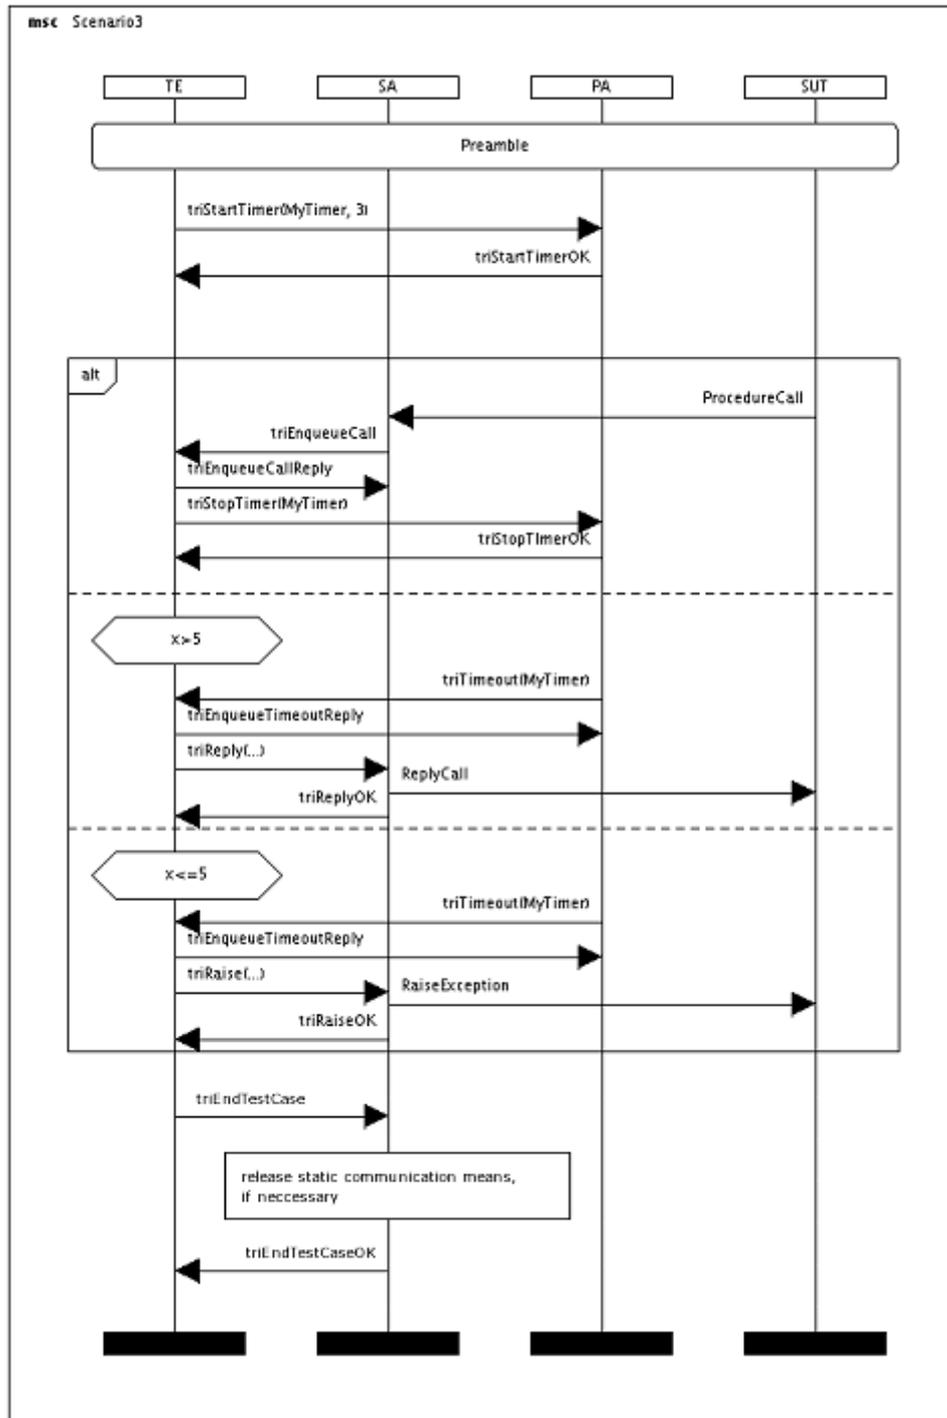


Figure 5 – Use Scenario 3

Annex A

IDL Summary

(This annex forms an integral part of this Recommendation)

This clause summarizes the IDL definition of TRI operations as defined in clause 5.

```
// *****
// Interface definition for the TTCN-3 Runtime Interface
// *****

module triInterface
{
    //
    // *****
    // Types
    // *****
    //

    // Connection
    native TriPortIdType;
    typedef sequence<TriPortIdType> TriPortIdListType;
    native TriComponentIdType;
    typedef sequence<TriComponentIdType> TriComponentIdListType;

    // Communication
    native TriMessageType;
    native TriAddressType;
    typedef sequence<TriAddressType> TriAddressListType;
    native TriSignatureIdType;
    native TriParameterType;
    typedef sequence<TriParameterType> TriParameterListType;
    native TriExceptionType;

    // Timing
    native TriTimerIdType;
    native TriTimerDurationType;

    // Miscellaneous
    native TriFunctionIdType;
    native TriTestCaseIdType;
    native TriStatusType;

    //
    // *****
    // Interfaces
    // *****
    //

    //
    // *****
    // The communication interface (Ref: TRI-Definition: 5.5)
    // *****
    //
    interface triCommunication
    {
        // Reset operation

        // Ref: TRI-Definition 5.5.1
        TriStatusType triSAReset();

        // Connection handling operations

        // Ref: TRI-Definition 5.5.2.1
        TriStatusType triExecuteTestCase(in TriTestCaseIdType testCaseId,
            in TriPortIdListType tsiPortList);

        // Ref: TRI-Definition 5.5.2.2
        TriStatusType triMap(in TriPortIdType compPortId, in TriPortIdType tsiPortId);
    }
}
```

```

// Ref: TRI-Definition 5.5.2.3
TriStatusType triUnmap(in TriPortIdType compPortId, in TriPortIdType tsiPortId);
// Ref: TRI-Definition 5.5.2.4
TriStatusType triEndTestCase();

// Message based communication operations

// Ref: TRI-Definition 5.5.3.1
TriStatusType triSend(in TriComponentIdType componentId, in TriPortIdType tsiPortId,
in TriAddressType SUTAddress, in TriMessageType sendMessage);
// Ref: TRI-Definition 5.5.3.2
TriStatusType triSendBC(in TriComponentIdType componentId, in TriPortIdType tsiPortId,
in TriMessageType sendMessage);
// Ref: TRI-Definition 5.5.3.3
TriStatusType triSendMC(in TriComponentIdType componentId, in TriPortIdType tsiPortId,
in TriAddressListType SUTAddresses, in TriMessageType sendMessage);

// Ref: TRI-Definition 5.5.3.4
void triEnqueueMsg(in TriPortIdType tsiPortId , in TriAddressType SUTAddress,
in TriComponentIdType componentId, in TriMessageType receivedMessage);

// Procedure based communication operations

// Ref: TRI-Definition 5.5.4.1
TriStatusType triCall(in TriComponentIdType componentId, in TriPortIdType tsiPortId,
in TriAddressType SUTAddress, in TriSignatureIdType signatureId,
in TriParameterListType parameterList);
// Ref: TRI-Definition 5.5.4.2
TriStatusType triCallBC(in TriComponentIdType componentId, in TriPortIdType tsiPortId,
in TriSignatureIdType signatureId,
in TriParameterListType parameterList);
// Ref: TRI-Definition 5.5.4.3
TriStatusType triCallMC(in TriComponentIdType componentId, in TriPortIdType tsiPortId,
in TriAddressListType SUTAddresses, in TriSignatureIdType signatureId,
in TriParameterListType parameterList);

// Ref: TRI-Definition 5.5.4.4
TriStatusType triReply(in TriComponentIdType componentId, in TriPortIdType tsiPortId,
in TriAddressType SUTAddress, in TriSignatureIdType signatureId,
in TriParameterListType parameterList, in TriParameterType returnValue );
// Ref: TRI-Definition 5.5.4.5
TriStatusType triReplyBC(in TriComponentIdType componentId, in TriPortIdType tsiPortId,
in TriSignatureIdType signatureId,
in TriParameterListType parameterList, in TriParameterType returnValue );
// Ref: TRI-Definition 5.5.4.6
TriStatusType triReplyMC(in TriComponentIdType componentId, in TriPortIdType tsiPortId,
in TriAddressListType SUTAddresses, in TriSignatureIdType signatureId,
in TriParameterListType parameterList, in TriParameterType returnValue );

// Ref: TRI-Definition 5.5.4.7
TriStatusType triRaise(in TriComponentIdType componentId, in TriPortIdType tsiPortId,
in TriAddressType SUTAddress, in TriSignatureIdType signatureId,
in TriExceptionType exc);
// Ref: TRI-Definition 5.5.4.8
TriStatusType triRaiseBC(in TriComponentIdType componentId, in TriPortIdType tsiPortId,
in TriSignatureIdType signatureId,
in TriExceptionType exc);
// Ref: TRI-Definition 5.5.4.9
TriStatusType triRaiseMC(in TriComponentIdType componentId, in TriPortIdType tsiPortId,
in TriAddressListType SUTAddresses, in TriSignatureIdType signatureId,
in TriExceptionType exc);

// Ref: TRI-Definition 5.5.4.10
void triEnqueueCall(in TriPortIdType tsiPortId, in TriAddressType SUTAddress,
in TriComponentIdType componentId, in TriSignatureIdType signatureId,
in TriParameterListType parameterList );

// Ref: TRI-Definition 5.5.4.11
void triEnqueueReply(in TriPortIdType tsiPortId, in TriAddressType SUTAddress,
in TriComponentIdType componentId, in TriSignatureIdType signatureId,
in TriParameterListType parameterList, in TriParameterType returnValue );

// Ref: TRI-Definition 5.5.4.12
void triEnqueueException(in TriPortIdType tsiPortId, in TriAddressType SUTAddress,
in TriComponentIdType componentId, in TriSignatureIdType signatureId,
in TriExceptionType exc);

// Miscellaneous operations

```

```

// Ref: TRI-Definition 5.5.5.1
TriStatusType triSUTactionInformal(in string description);
};

//
// *****
// The platform interface (Ref: TRI-Definition: 5.6)
// *****
//
interface triPlatform
{
    // Reset Operation

    // Ref: TRI-Definition 5.6.1
    TriStatusType triPAReset();

    // Timer handling operations

    // Ref: TRI-Definition 5.6.2.1
    TriStatusType triStartTimer(in TriTimerIdType timerId,
    in TriTimerDurationType timerDuration);

    // Ref: TRI-Definition 5.6.2.2
    TriStatusType triStopTimer(in TriTimerIdType timerId);

    // Ref: TRI-Definition 5.6.2.3
    TriStatusType triReadTimer(in TriTimerIdType timerId,
    out TriTimerDurationType elapsedTime);

    // Ref: TRI-Definition 5.6.2.4
    TriStatusType triTimerRunning(in TriTimerIdType timerId, out boolean running);

    // Ref: TRI-Definition 5.6.2.5
    void triTimeout(in TriTimerIdType timerId);

    // Miscellaneous operations

    // Ref: TRI-Definition 5.6.3.1
    TriStatusType triExternalFunction(in TriFunctionIdType functionId,
    inout TriParameterListType parameterList,
    out TriParameterType returnValue);
};
};

```

Bibliography

- [b-OMG CORBA] OMG CORBA (V2.4.1): *The Common Object Request Broker: Architecture and Specification*, November 2000.
- [b-INTOOL CGI] INTOOL CGI/NPL038 (V2.2): *Generic Compiler/Interpreter interface; GCI Interface Specification, Infrastructural Tools*, December 1996.

SERIES OF ITU-T RECOMMENDATIONS

Series A	Organization of the work of ITU-T
Series D	General tariff principles
Series E	Overall network operation, telephone service, service operation and human factors
Series F	Non-telephone telecommunication services
Series G	Transmission systems and media, digital systems and networks
Series H	Audiovisual and multimedia systems
Series I	Integrated services digital network
Series J	Cable networks and transmission of television, sound programme and other multimedia signals
Series K	Protection against interference
Series L	Construction, installation and protection of cables and other elements of outside plant
Series M	Telecommunication management, including TMN and network maintenance
Series N	Maintenance: international sound programme and television transmission circuits
Series O	Specifications of measuring equipment
Series P	Telephone transmission quality, telephone installations, local line networks
Series Q	Switching and signalling
Series R	Telegraph transmission
Series S	Telegraph services terminal equipment
Series T	Terminals for telematic services
Series U	Telegraph switching
Series V	Data communication over the telephone network
Series X	Data networks, open system communications and security
Series Y	Global information infrastructure, Internet protocol aspects and next-generation networks
Series Z	Languages and general software aspects for telecommunication systems